

## Recessed Downlight

### Product information



Product number:	ALST85 - 32
Input Voltage (v):	220-240V AC
Dimming:	On/Off, Triac, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25° C)
Rotation Angle (degree):	350
Tilting Angle (degree):	90
IP Rating:	20
Working Temperature (° C)	-5 ~ +30
Storage Temperature (° C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black




### Packaging information

N.W. lamp (Kg):	0.96
G.W. Carton (Kg):	14
Master carton dimensions(mm):	720x295x220
Quantity per carton(PCS):	10



Honeycomb ring    Oval diffuser    Diffuser    Anti-glare ring

Beam	Watt	CRI	Luminous	CCT	Code
21	32W	90	3060.1 lm	4000K	ALST85S-NC32G40-S
			2886.9 lm	3000K	ALST85S-NC32G30-S
			2684.8 lm	2700K	ALST85S-NC32G27-S
25	32W	90	2987.5 lm	4000K	ALST85S-NC32G40-M
			2818.4 lm	3000K	ALST85S-NC32G30-M
			2621.1 lm	2700K	ALST85S-NC32G27-M
35	32W	90	2925.8 lm	4000K	ALST85S-NC32G40-F
			2760.2 lm	3000K	ALST85S-NC32G30-F
			2566.9 lm	2700K	ALST85S-NC32G27-F
45	32W	90	2945.6 lm	4000K	ALST85S-NC32G40-WF
			2778.9 lm	3000K	ALST85S-NC32G30-WF
			2584.4 lm	2700K	ALST85S-NC32G27-WF

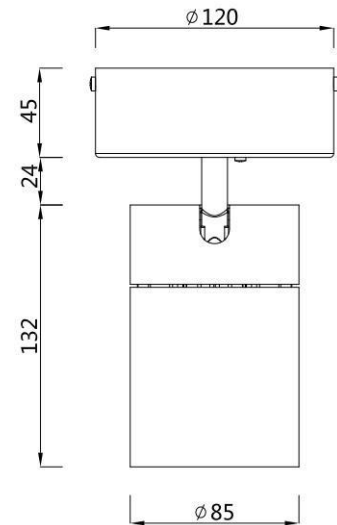

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

Code composition: **ALST 85 S - N C 34 G30 - S - B - L01** \_ \_ \_

① Product series	② Model	③ App types	④ Dimming type	⑤ COB type	⑥ Watt	⑦ LED Kelvin & CRI	⑧ Optical angle	⑨ Finishes	⑩ Accessories
ALST	85	S Spotlight	N No dimming T Triac dimming V 1-10V dimming D DALI dimming	C COB	34W	H27 2700 >95 S G30 3000 >90 M E40 4000 >80 F C50 5000 >70 WF	Spot Medium Flood Wide Flood	White Black	L01 Honeycomb L02 Oval diffuser L03 Diffuser L04 Anti-glare ring