

FLOW.IT Series


DL34-S-15W

optical lens



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	350mA, 35-37V
Beam Angle:	12°/24°/36°/60°
Life Time:	> 50,000h - L80 - B10 (Ta 25° C)
Operating temperature:	-20°C~40°C
Certificate:	CE/RoHS
Weight:	0.35kg

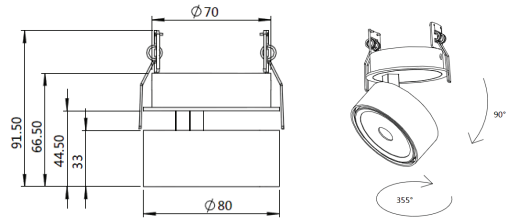


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
15W	>80	▲ 12°	1500 lm	3000K	○	DL341-15W-830-W-12-S
					●	DL341-15W-830-B-12-S
		1600 lm	4000K	○	DL341-15W-840-W-12-S	
				●	DL341-15W-840-B-12-S	
		▲ 24°	1480 lm	3000K	○	DL341-15W-830-W-24-S
					●	DL341-15W-830-B-24-S
	1580 lm	4000K	○	DL341-15W-840-W-24-S		
			●	DL341-15W-840-B-24-S		
	▲ 36°	1520 lm	3000K	○	DL341-15W-830-W-36-S	
				●	DL341-15W-830-B-36-S	
	1650 lm	4000K	○	DL341-15W-840-W-36-S		
			●	DL341-15W-840-B-36-S		
>90	▲ 12°	1270 lm	3000K	○	DL341-15W-930-W-12-S	
				●	DL341-15W-930-B-12-S	
	▲ 24°	1370 lm	3000K	○	DL341-15W-930-W-24-S	
				●	DL341-15W-930-B-24-S	
	▲ 36°	1260 lm	3000K	○	DL341-15W-930-W-36-S	
				●	DL341-15W-930-B-36-S	

Technical Data test pattern


CRI80 12°

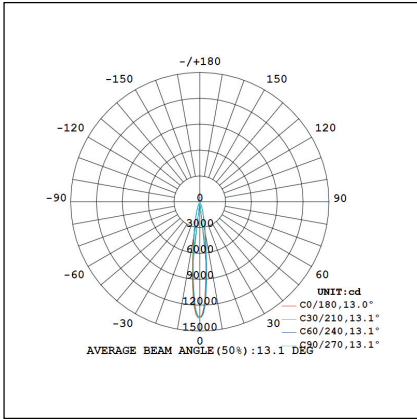


3000K

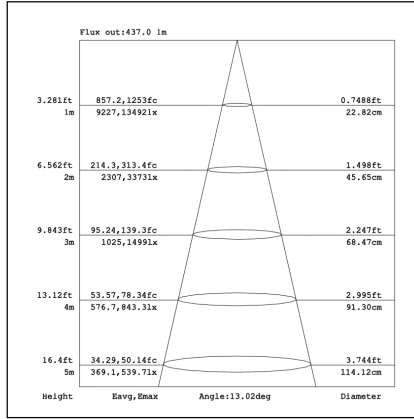


4000K

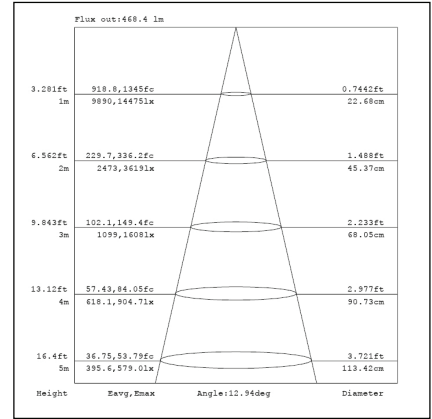


CRI80 24°

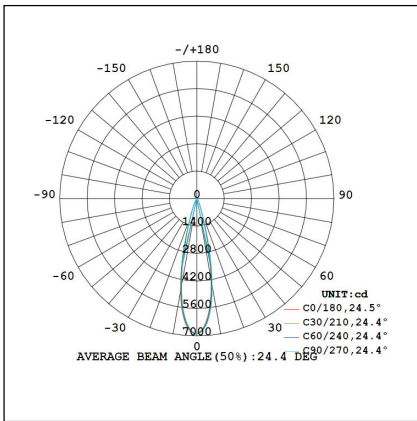


3000K

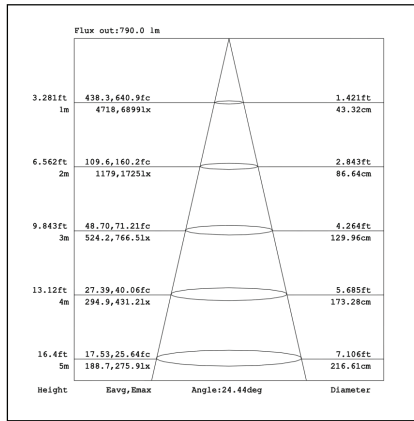


4000K

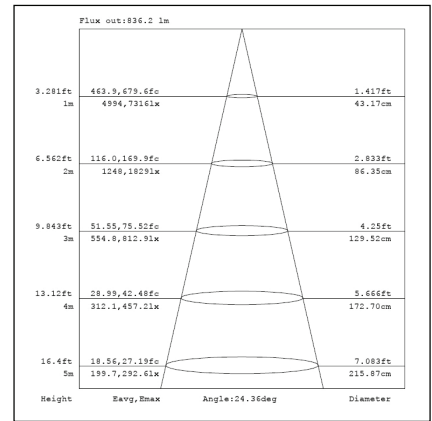


CRI80 36°

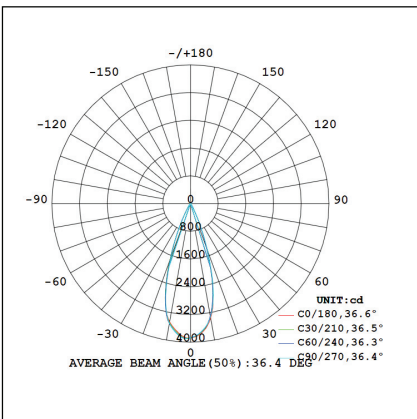

3000K

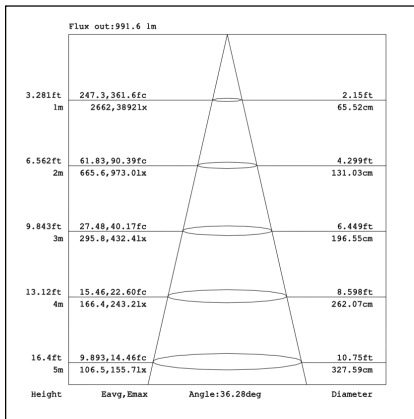




4000K

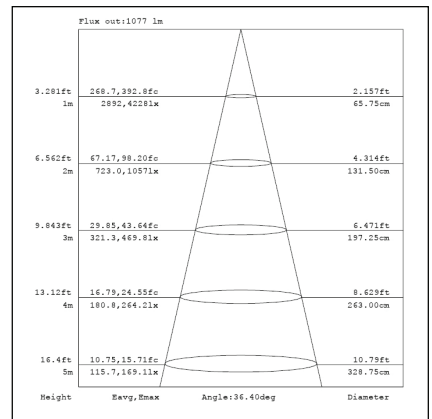

CRI90 12°

3000K




4000K

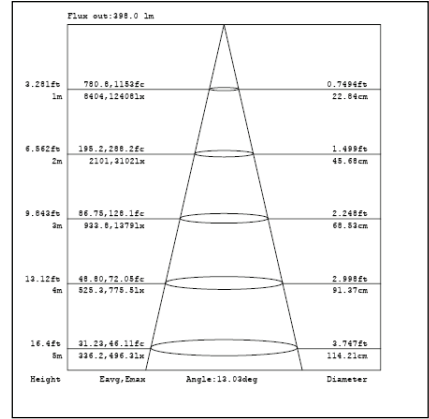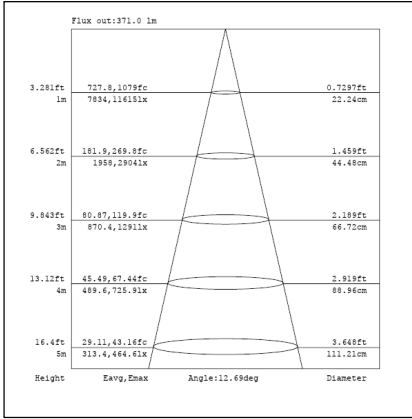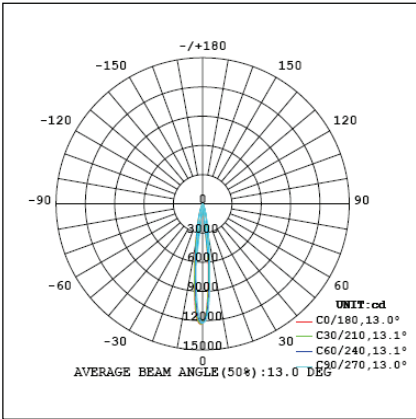

CRI90 24°

3000K




4000K

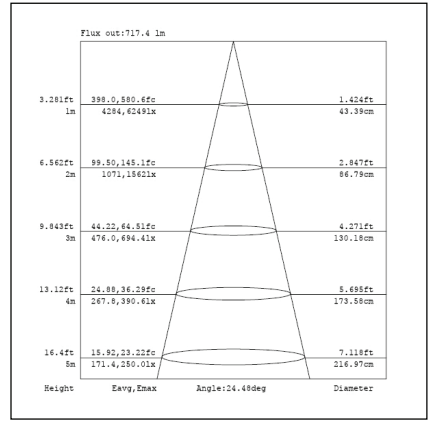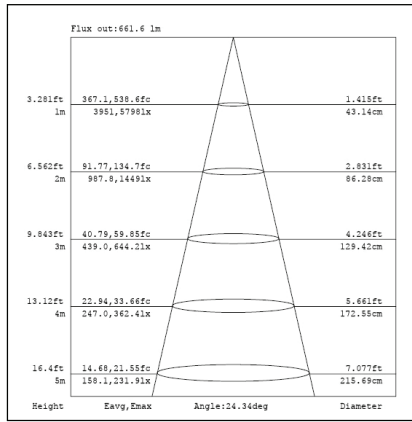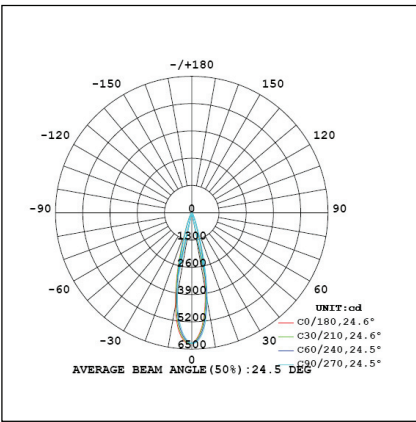


CRI90 36°

3000K


4000K

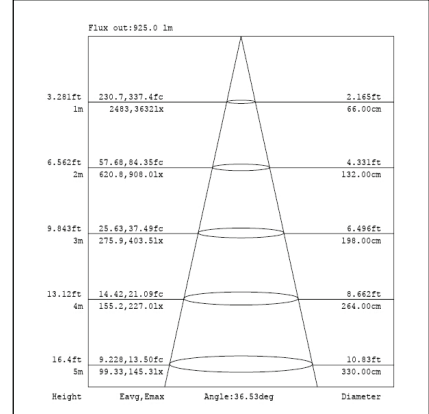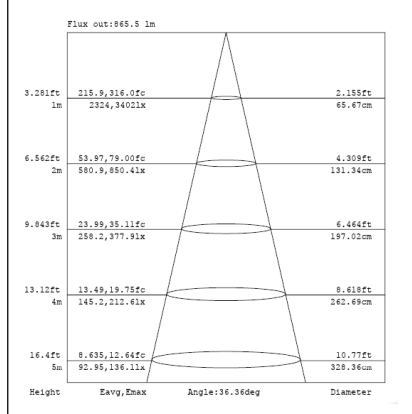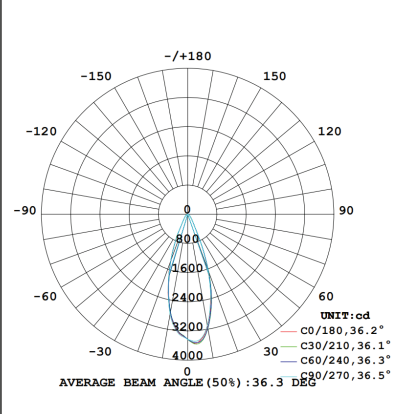

Packaging:




Box
 L105*W105*H125mm
 1pc/box
 GW: 0.45kg/box




Outer carton
 L430*W430*H300mm
 32pcs/CTN
 GW: 16kg/carton

Installation instruction


1, Cut Hole

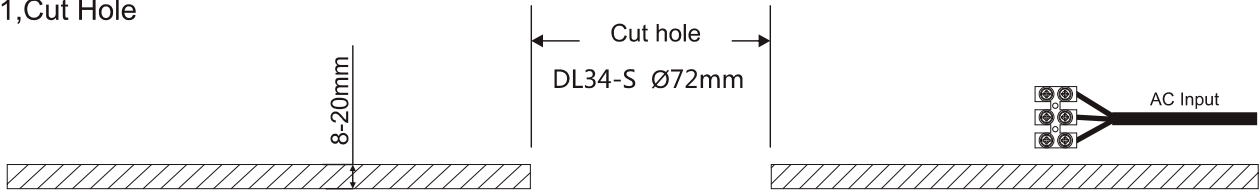

2, Connect Wire

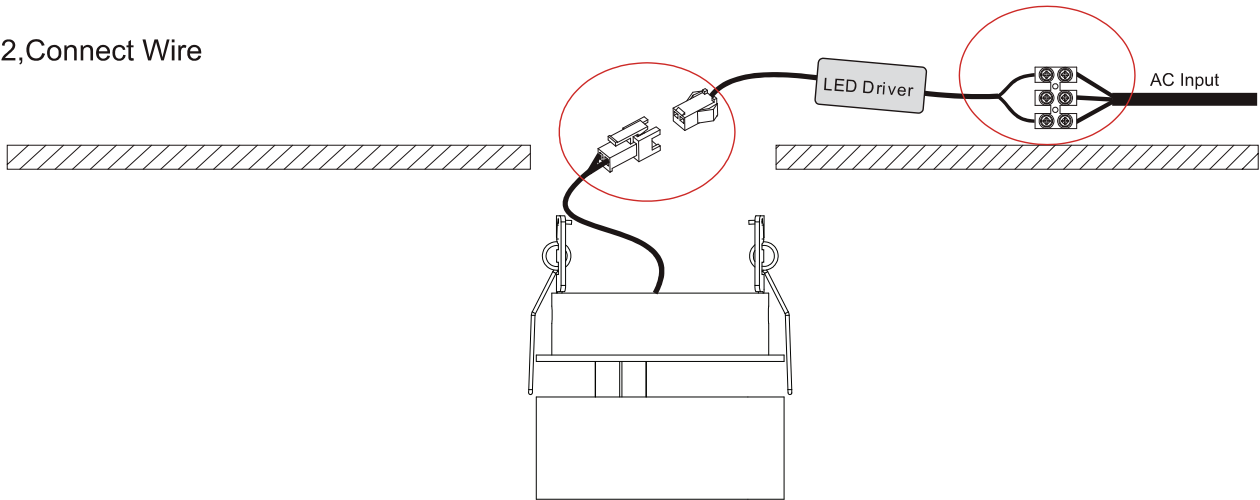

3, Fit the luminaire in the hole

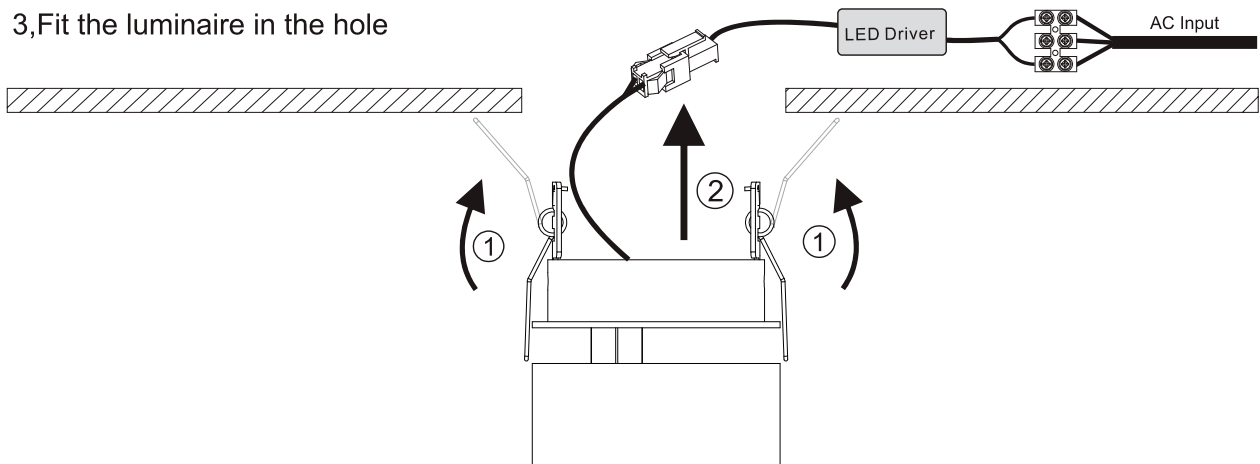

4, Finish

