

Pro Series

**RL04-15W**

Optical lens



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	350mA (35-37V)
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE ROHS
Weight:	0.5KG

Ordering Information:


○ White ● Black

Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
15W	>80	▲ 16°	1280 lm	3000K	○	RL041-15W-830-W-16
					●	RL041-15W-830-B-16
			1320 lm	4000K	○	RL041-15W-840-W-16
					●	RL041-15W-840-B-16
		▲ 24°	1260 lm	3000K	○	RL041-15W-830-W-24
					●	RL041-15W-830-B-24
		1310 lm	4000K	○	RL041-15W-840-W-24	
				●	RL041-15W-840-B-24	
	▲ 38°	1210 lm	3000K	○	RL041-15W-830-W-38	
				●	RL041-15W-830-B-38	
		1260 lm	4000K	○	RL041-15W-840-W-38	
				●	RL041-15W-840-B-38	
	▲ 60°	1230 lm	3000K	○	RL041-15W-830-W-60	
				●	RL041-15W-830-B-60	
		1270 lm	4000K	○	RL041-15W-840-W-60	
				●	RL041-15W-840-B-60	
	>90	▲ 16°	1080 lm	3000K	○	RL041-15W-930-W-16
					●	RL041-15W-930-B-16
		1220 lm	4000K	○	RL041-15W-940-W-16	
				●	RL041-15W-940-B-16	
▲ 24°		1080 lm	3000K	○	RL041-15W-930-W-24	
				●	RL041-15W-930-B-24	
		1210 lm	4000K	○	RL041-15W-940-W-24	
				●	RL041-15W-940-B-24	
▲ 38°		1040 lm	3000K	○	RL041-15W-930-W-38	
				●	RL041-15W-930-B-38	
		1150 lm	4000K	○	RL041-15W-940-W-38	
				●	RL041-15W-940-B-38	
▲ 60°	1070 lm	3000K	○	RL041-15W-930-W-60		
			●	RL041-15W-930-B-60		
	1180 lm	4000K	○	RL041-15W-940-W-60		
			●	RL041-15W-940-B-60		




Technical Data test pattern


CRI80 16°

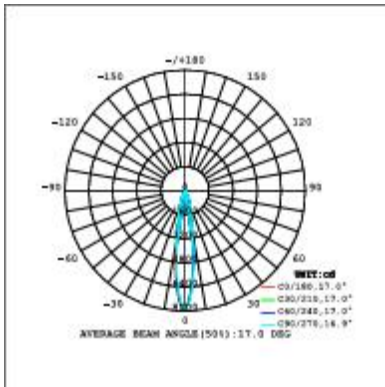


3000K

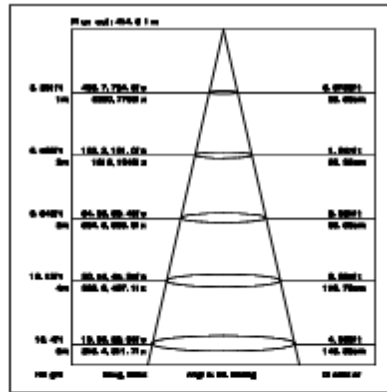


4000K

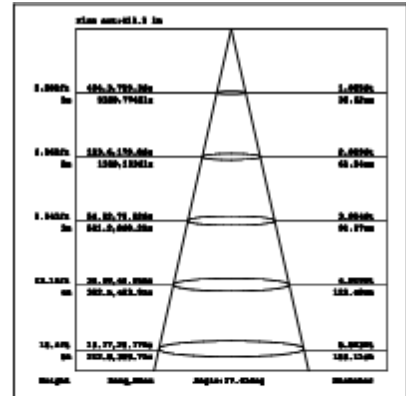


CRI80 24°

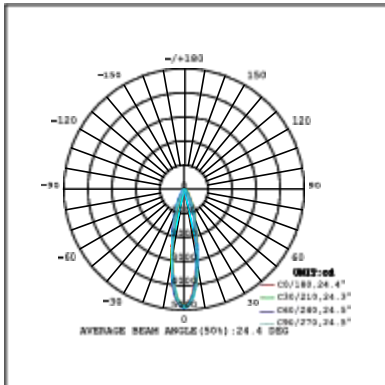


3000K

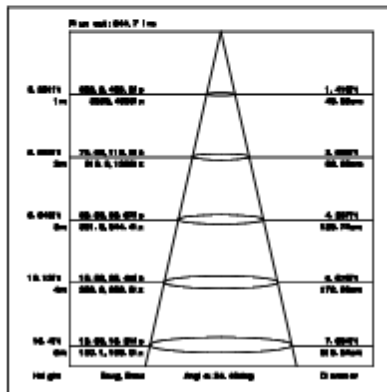


4000K

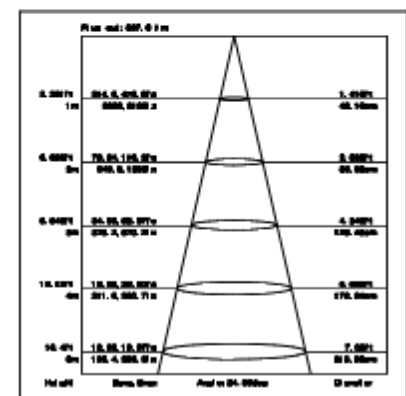


CRI80 38°

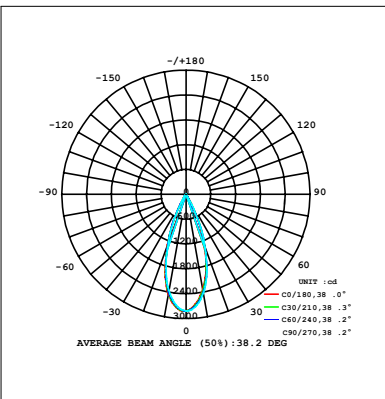


3000K

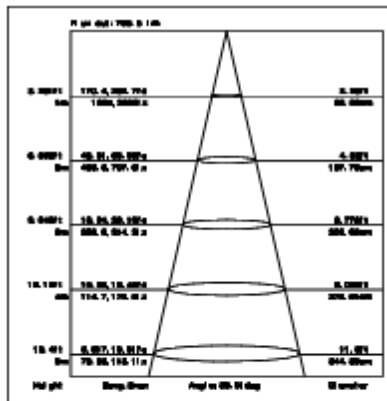


4000K

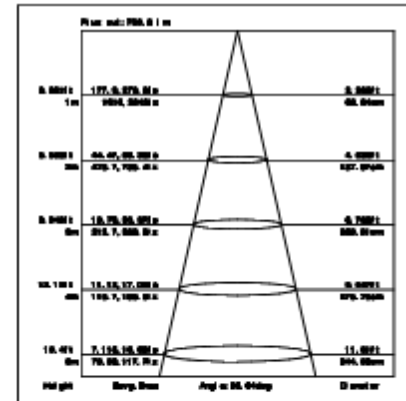


CRI80 60°

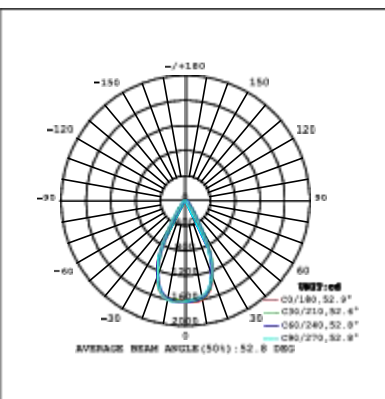


3000K

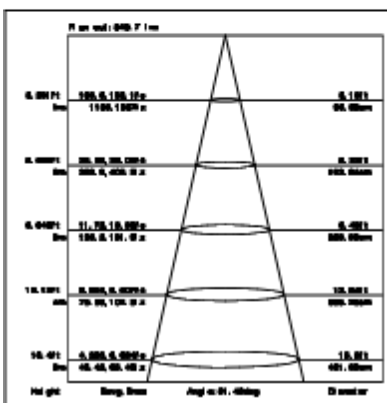


4000K

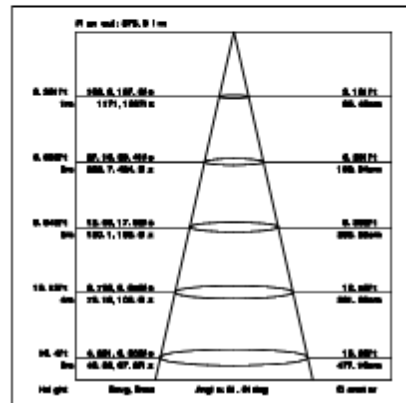


CRI90 16°

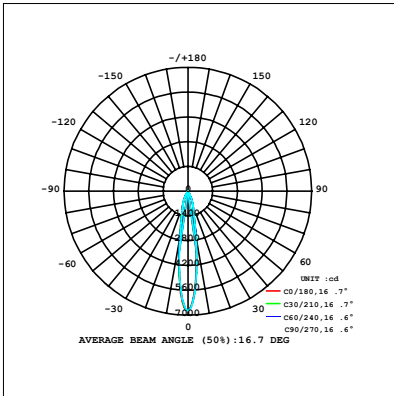


3000K

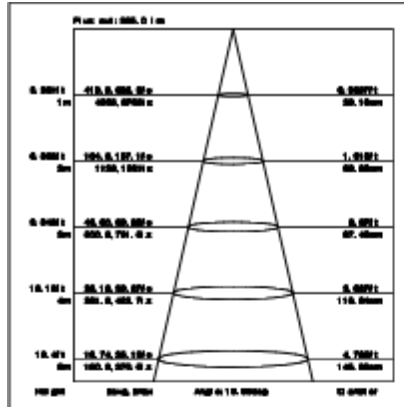


4000K

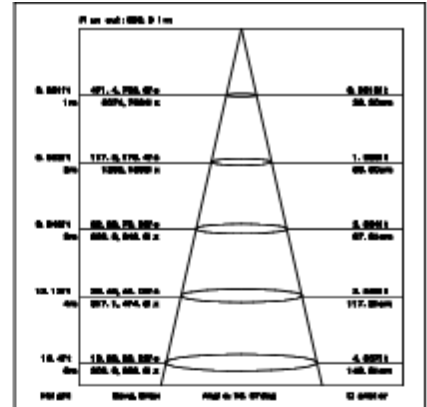


CRI90 24°

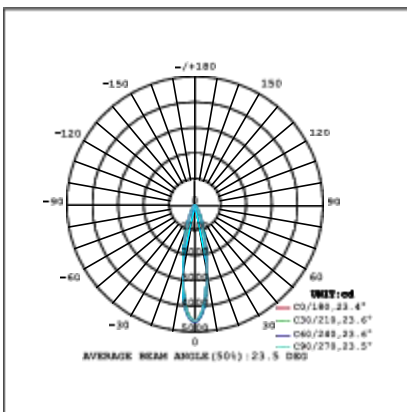


3000K

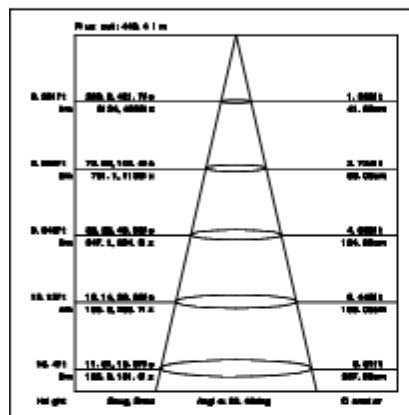


4000K

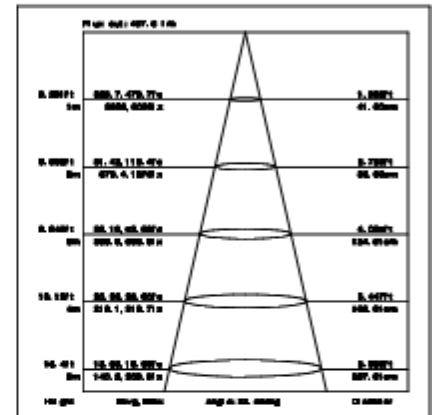


CRI90 38°

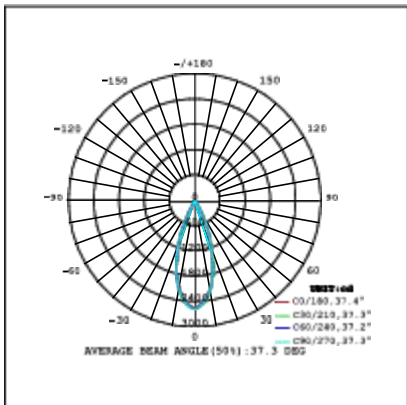


3000K

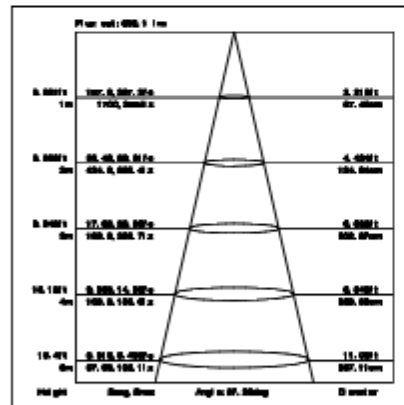


4000K

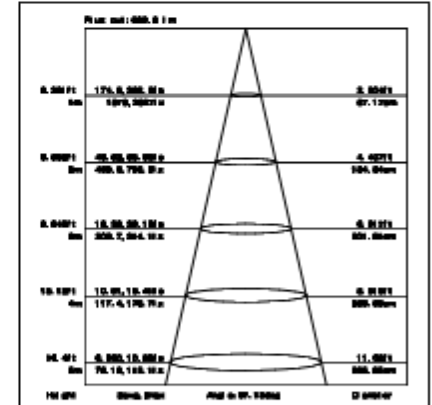


CRI90 60°

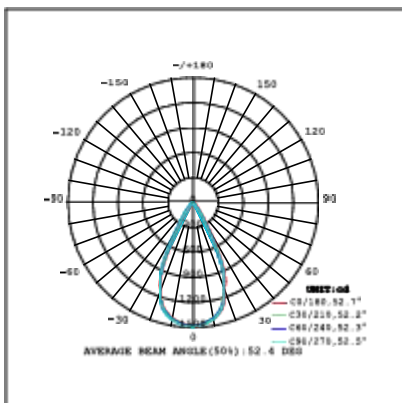


3000K

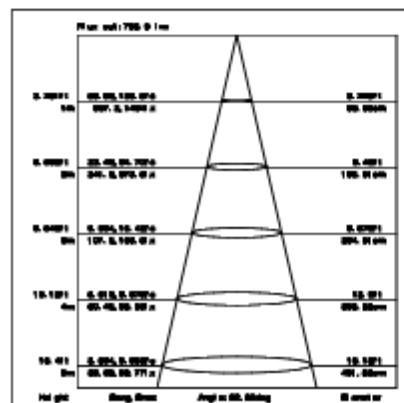


4000K

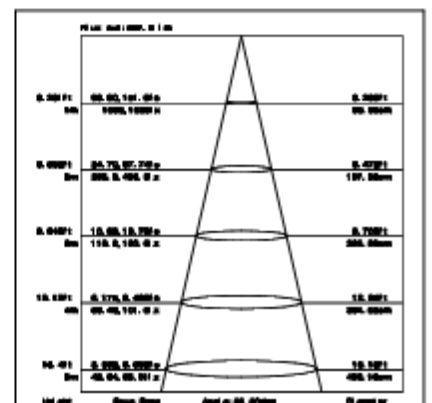

Packaging:




Box  
1pc/box  
GW: 0.7kg/box




Outer carton  
L515\*W415\*H305mm  
20 pcs/CTN  
GW: 16kg/carton

Installation instruction


1,Cut Hole

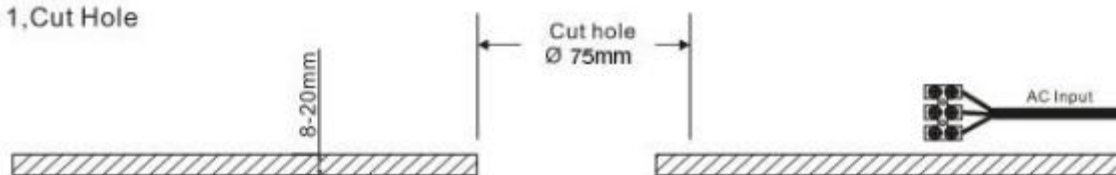


2,Connect Wire

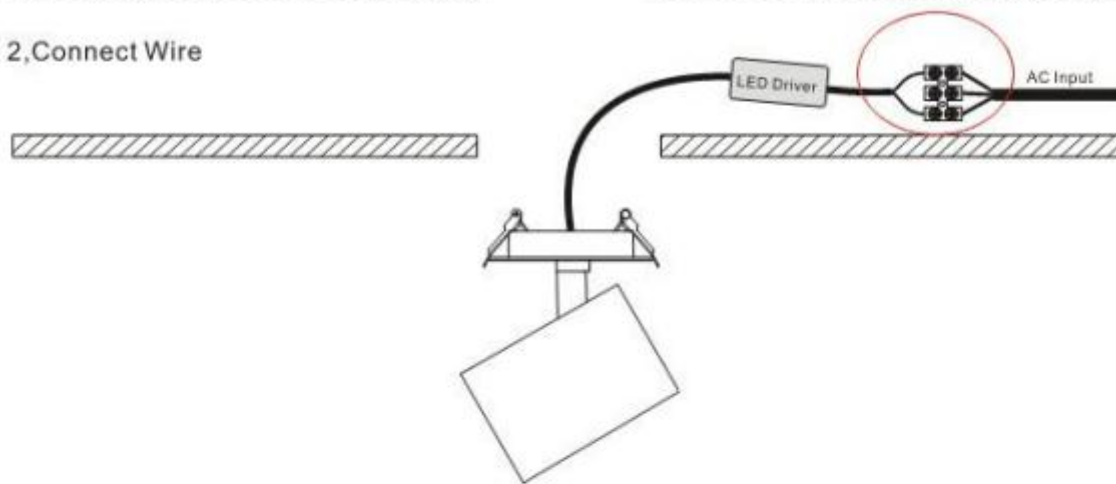

3,Fit the luminaire in the hole

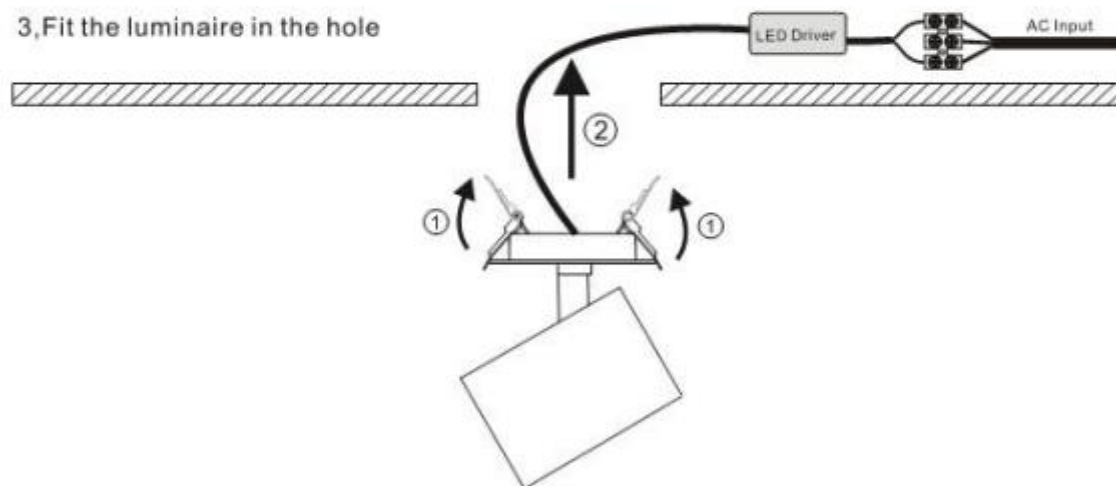

4,Finish

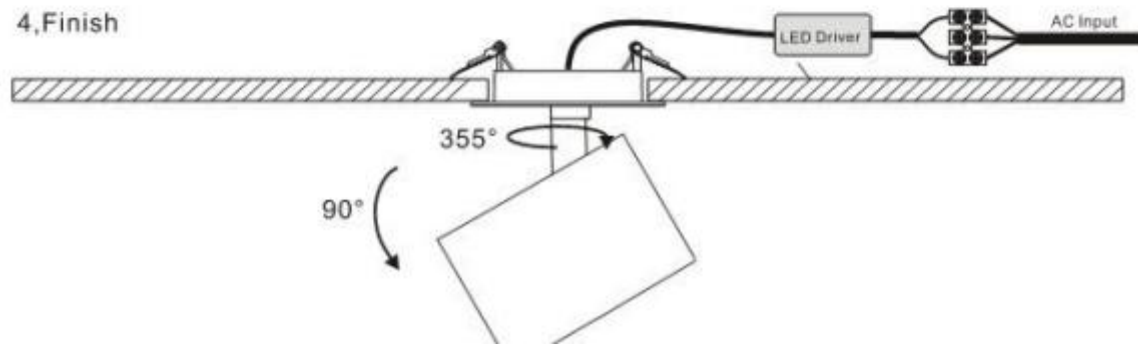

Product naming system

