

FLOW.IT Series


**SD10-L-28W**

optical lens



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Beam Angle:	12°/24°/36°
Life Time:	> 50,000h - L80 - B10 (Ta 25° C)
Operating temperature:	-20°C~40°C
Certificate:	CE/RoHS
Weight:	0.75kg



Ordering Information:

○ White ● Black




Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
28W	>80	▲ 12°	2825 lm	3000K	○	SD101-28W-830-W-12-L
					●	SD101-28W-830-B-12-L
		2897 lm	4000K	○	SD101-28W-840-W-12-L	
				●	SD101-28W-840-B-12-L	
		▲ 24°	2803 lm	3000K	○	SD101-28W-830-W-24-L
					●	SD101-28W-830-B-24-L
			2871 lm	4000K	○	SD101-28W-840-W-24-L
					●	SD101-28W-840-B-24-L
	▲ 36°	2876 lm	3000K	○	SD101-28W-830-W-36-L	
				●	SD101-28W-830-B-36-L	
			2942 lm	4000K	○	SD101-28W-840-W-36-L
					●	SD101-28W-840-B-36-L
>90	▲ 12°	2165 lm	3000K	○	SD101-28W-930-W-12-L	
				●	SD101-28W-930-B-12-L	
	▲ 24°	2159 lm	3000K	○	SD101-28W-930-W-24-L	
				●	SD101-28W-930-B-24-L	
	▲ 36°	2217 lm	3000K	○	SD101-28W-930-W-36-L	
				●	SD101-28W-930-B-36-L	

Technical Data test pattern

CRI80 12°

3000K




4000K

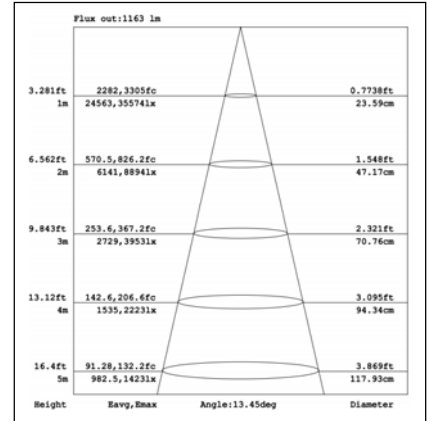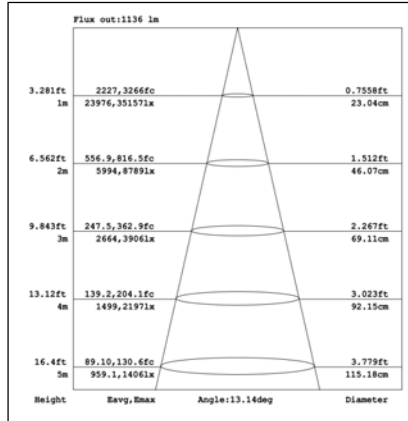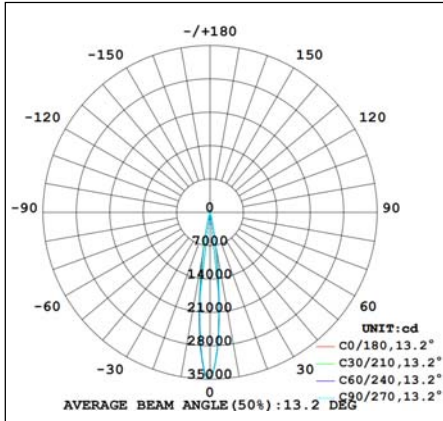

CRI80 24°

3000K




4000K

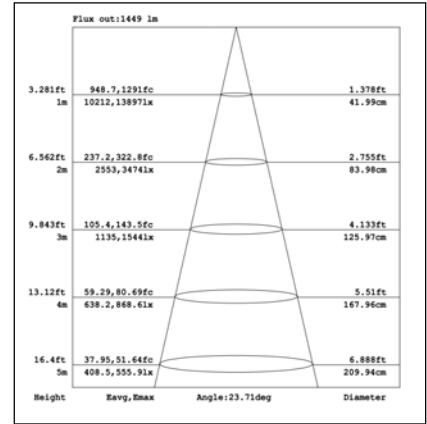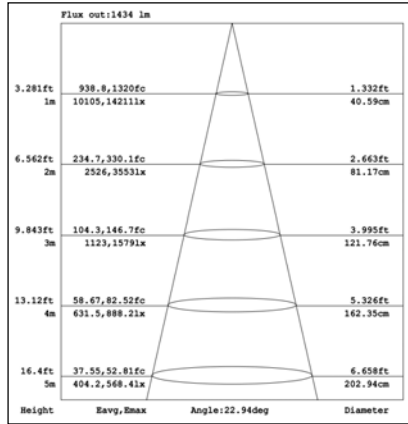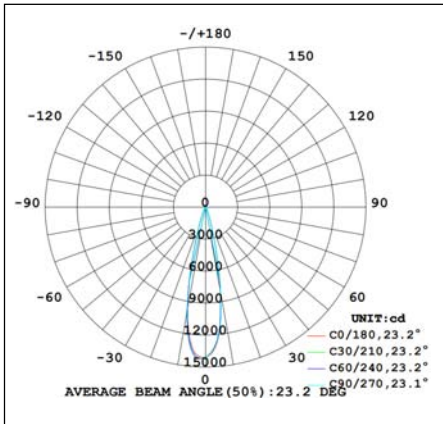

CRI80 36°



3000K

4000K

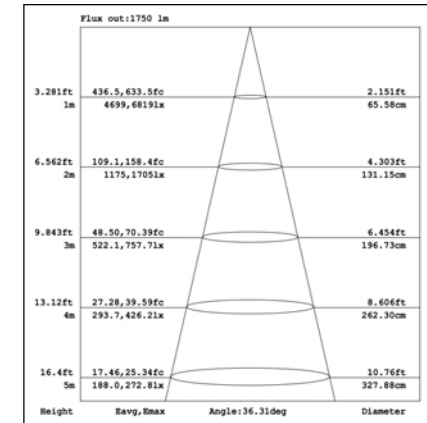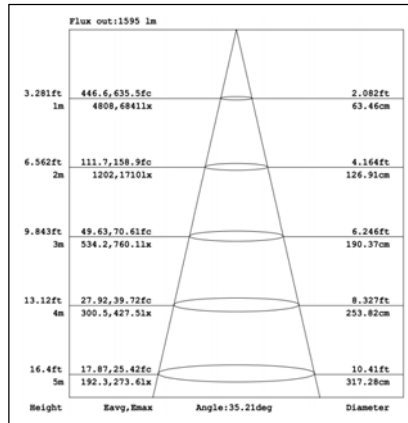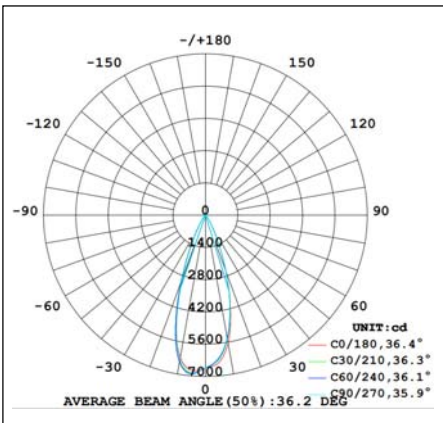



CRI90 12°

3000K

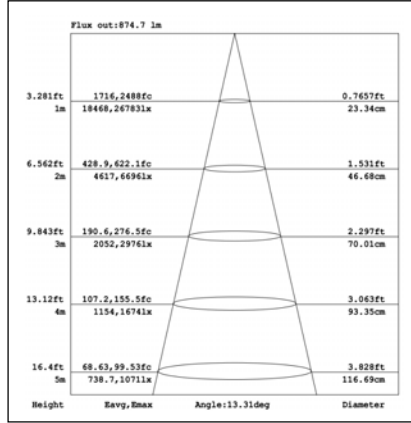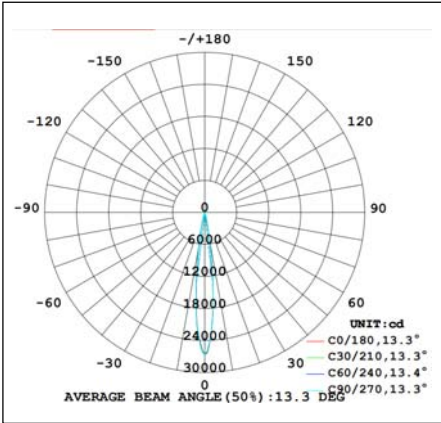



CRI90 24°

3000K

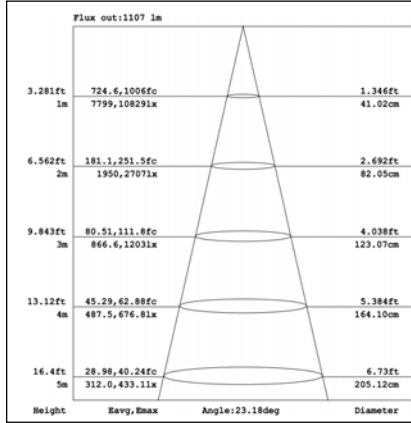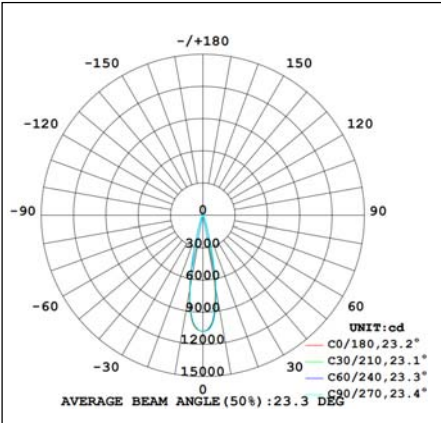


CRI90 36°

3000K

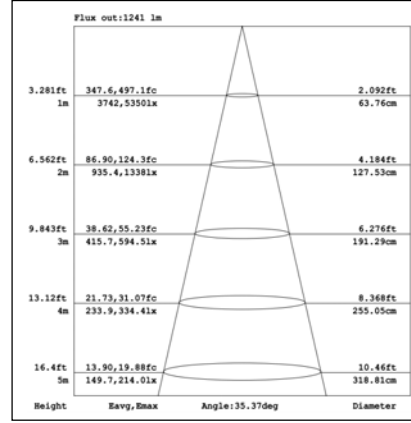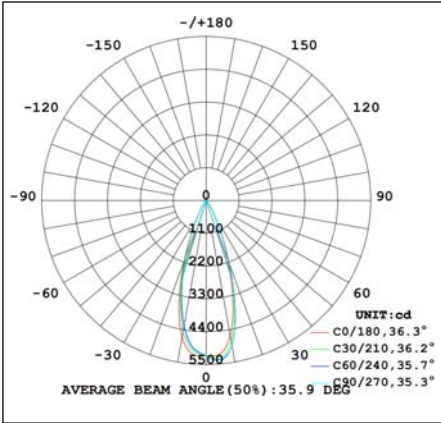


Installation instruction

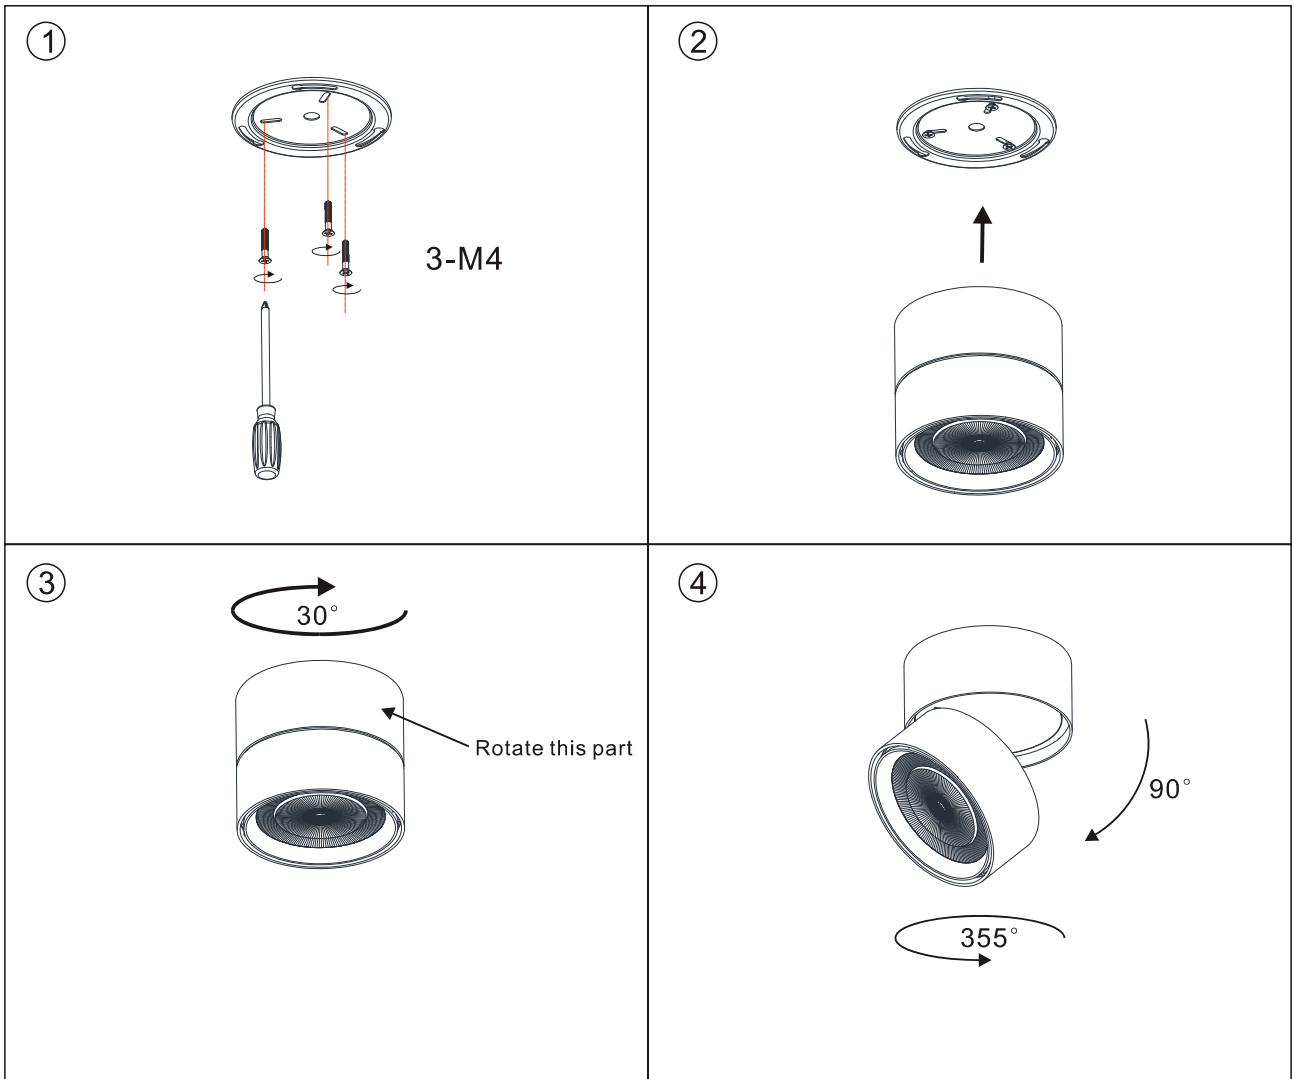


Packaging:

SD10-L



**Box**

L115\*W115\*H125mm  
1pc/box  
GW: 0.8kg/box



**Outer carton**

L600\*W250\*H270mm  
20pcs/CTN  
GW: 17kg/carton