

iTrack Vario Series


**TL32-30W**

Reflector



Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Rated life:	>50,000 hours
Operating temperature:	-20°C~40°C
Storage temperature:	-30°C~60°C
Certificate:	CE/RoHS
Weight:	1.25KG

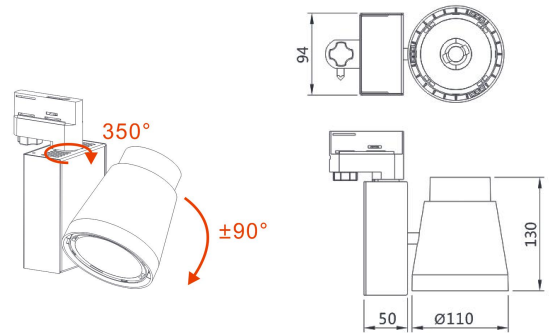


Ordering Information:

○ White ● Black


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number
30W	>80	▲ 15°	2980 lm	3000K	○	TL324-30W-830-W-15
					●	TL324-30W-830-B-15
		▲ 20°	3160 lm	4000K	○	TL324-30W-840-W-15
					●	TL324-30W-840-B-15
		▲ 45°	3010 lm	3000K	○	TL324-30W-830-W-20
					●	TL324-30W-830-B-20
	>90	▲ 15°	3250 lm	4000K	○	TL324-30W-840-W-20
					●	TL324-30W-840-B-20
		▲ 20°	2990 lm	3000K	○	TL324-30W-830-W-45
					●	TL324-30W-830-B-45
		▲ 45°	3190 lm	4000K	○	TL324-30W-840-W-45
					●	TL324-30W-840-B-45
	>90	▲ 15°	2670 lm	3000K	○	TL324-30W-930-W-15
					●	TL324-30W-930-B-15
		▲ 20°	2810 lm	4000K	○	TL324-30W-940-W-15
					●	TL324-30W-940-B-15
		▲ 45°	2700 lm	3000K	○	TL324-30W-930-W-20
					●	TL324-30W-930-B-20
		▲ 15°	2830 lm	4000K	○	TL324-30W-940-W-20
					●	TL324-30W-940-B-20
		▲ 20°	2680 lm	3000K	○	TL324-30W-930-W-45
					●	TL324-30W-930-B-45
		▲ 45°	2810 lm	4000K	○	TL324-30W-940-W-45
					●	TL324-30W-940-B-45

Technical Data test pattern


CRI80 15°

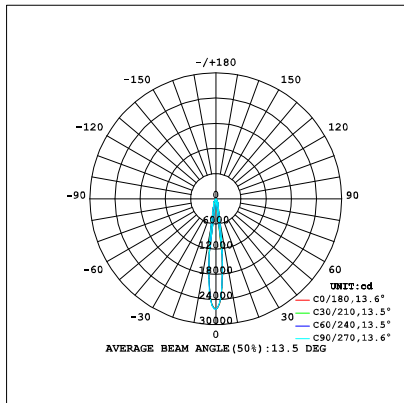


3000K

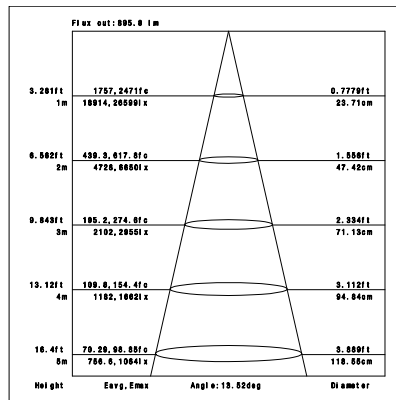


4000K

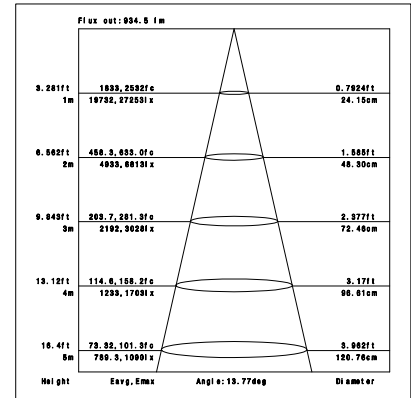


CRI80 20°

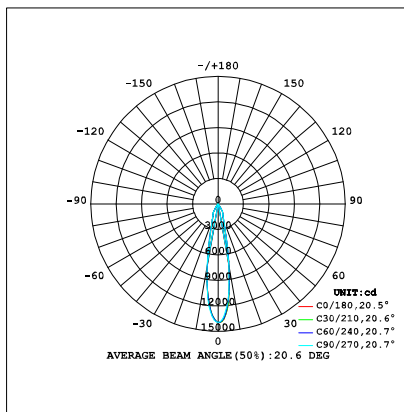


3000K

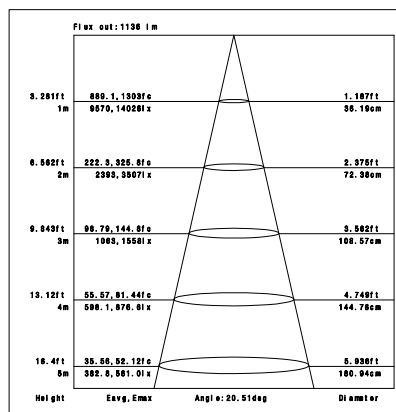


4000K

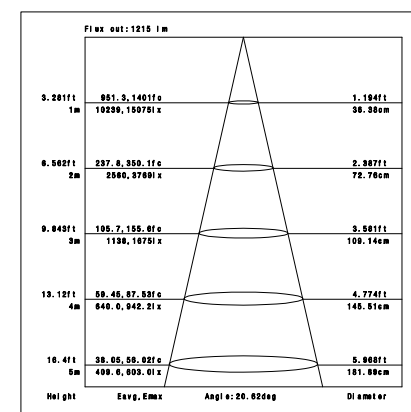


CRI80 45°

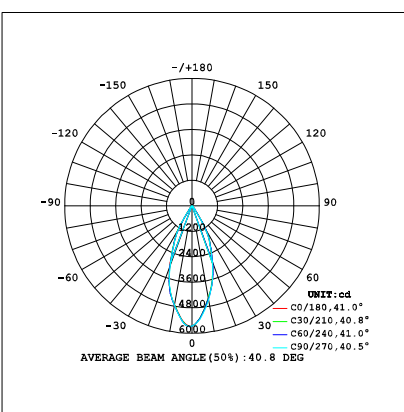

3000K

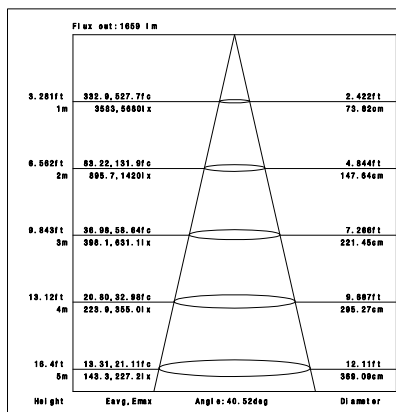




4000K

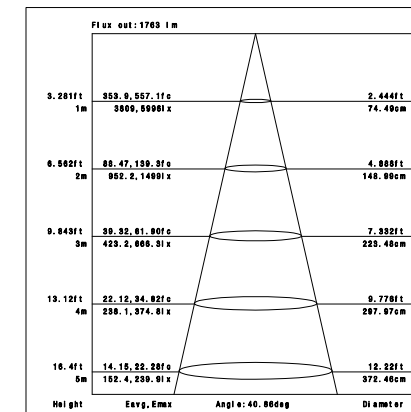

CRI90 15°

3000K




4000K

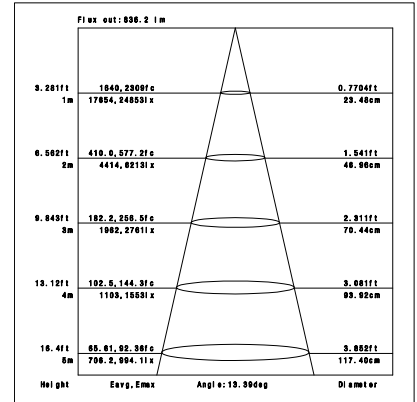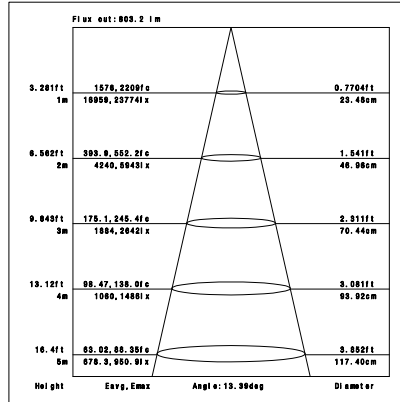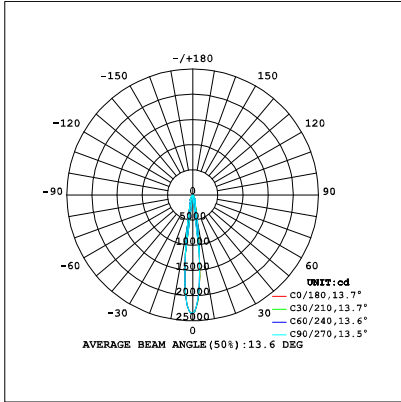

CRI90 20°

3000K




4000K

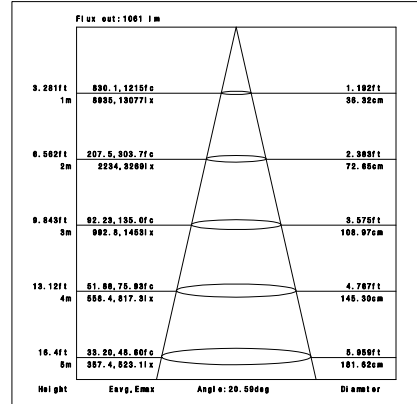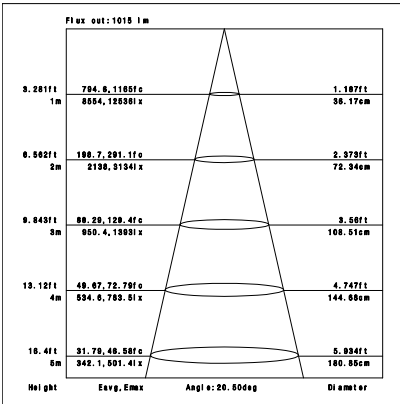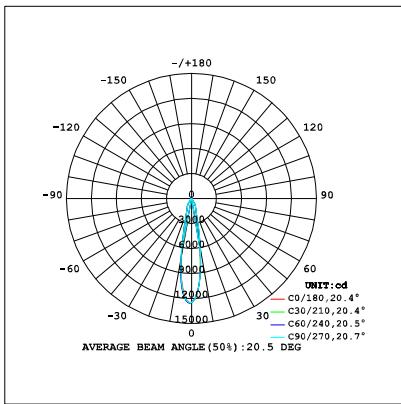





CRI90 45°

3000K


4000K

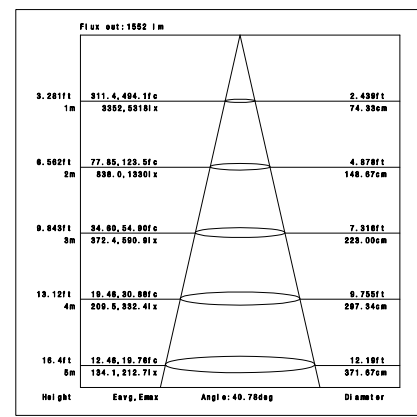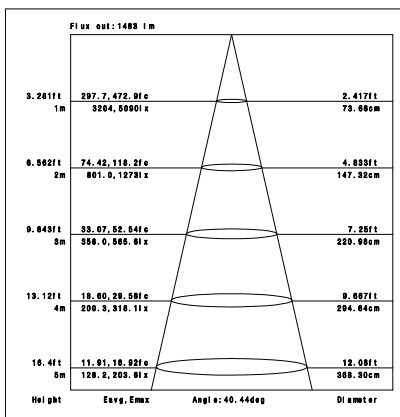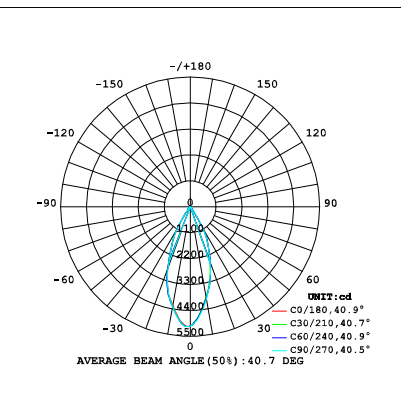


Installation instruction

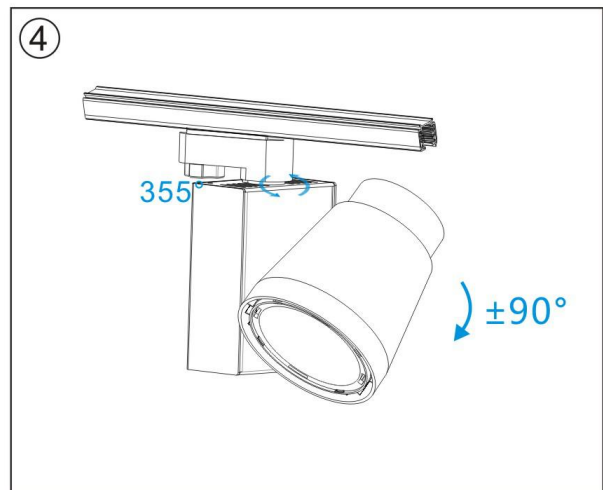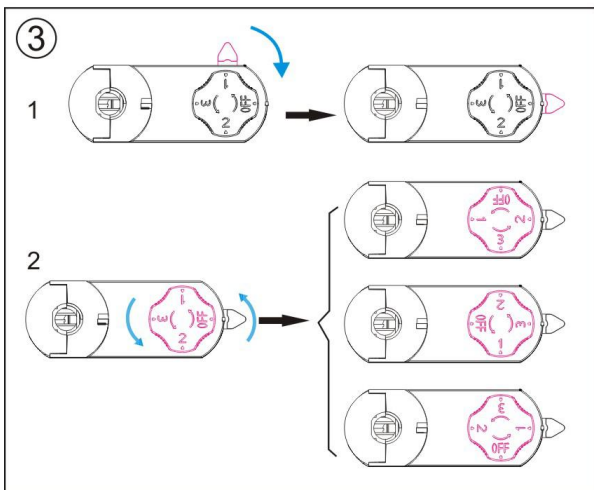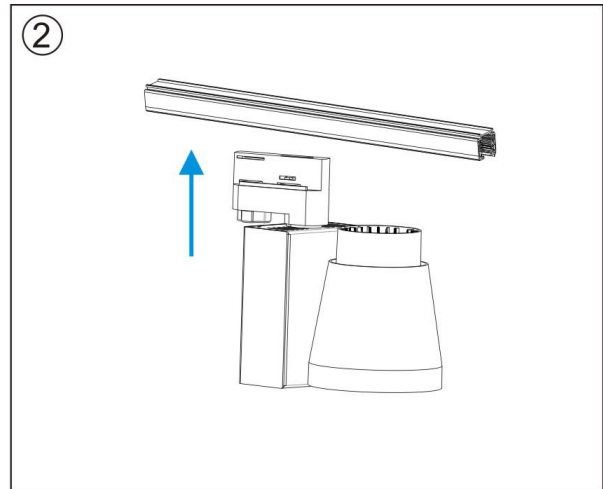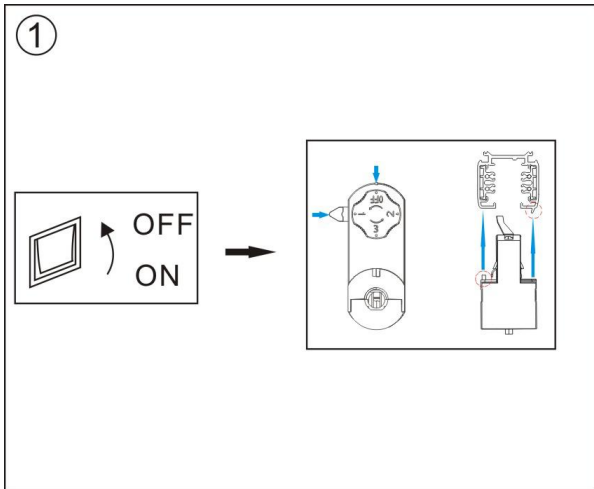

Packaging:



**Box**  
 L165\*W130\*H200mm  
 1pc/box  
 GW: 1.55kg/box

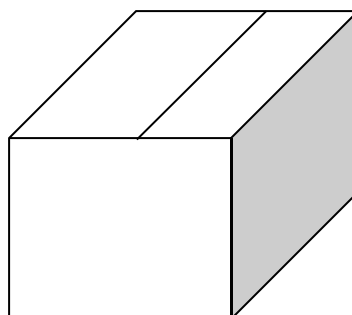

**Outer carton**  
 L545Xw355xH430mm  
 16pcs/CTN  
 GW: 26kg/carton

Product naming system

