

Square series


TL46-M-20W

optical lens



Technical Parameters:

| Name | Parameters |
|------------------------|----------------------------------|
| Light source: | COB |
| Input Voltage: | AC220~240V 50/60Hz |
| LED Current: | 500mA, 35-37V |
| Beam Angle: | 15°/20°/36°/48°/60° |
| Life Time: | > 50,000h - L80 - B10 (Ta 25° C) |
| Operating temperature: | -20°C~40°C |
| Certificate: | CE/RoHS |
| Weight: | 0.5kg |

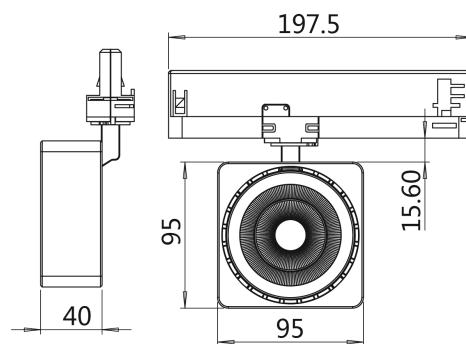

Ordering Information:


○ White ● Black

| Power | CRI | Beam Angle | Luminous | CCT | Housing | Part Number |
|-------|-----|------------|----------|-------|---------|----------------------|
| 20W | >80 | ▲ 15° | 1910 lm | 3000K | ○ | TL46*-20W-830-W-15-M |
| | | | | | ● | TL46*-20W-830-B-15-M |
| | | | 2102 lm | 4000K | ○ | TL46*-20W-840-W-15-M |
| | | | | | ● | TL46*-20W-840-B-15-M |
| | | ▲ 20° | 1778 lm | 3000K | ○ | TL46*-20W-830-W-20-M |
| | | | | | ● | TL46*-20W-830-B-20-M |
| | | | 1962 lm | 4000K | ○ | TL46*-20W-840-W-20-M |
| | | | | | ● | TL46*-20W-840-B-20-M |
| | | ▲ 36° | 1870 lm | 3000K | ○ | TL46*-20W-830-W-36-M |
| | | | | | ● | TL46*-20W-830-B-36-M |
| | | | 2086 lm | 4000K | ○ | TL46*-20W-840-W-36-M |
| | | | | | ● | TL46*-20W-840-B-36-M |
| | >90 | ▲ 15° | 1566 lm | 3000K | ○ | TL46*-20W-930-W-15-M |
| | | | | | ● | TL46*-20W-930-B-15-M |
| | | | 1766 lm | 4000K | ○ | TL46*-20W-940-W-15-M |
| | | | | | ● | TL46*-20W-940-B-15-M |
| | | ▲ 20° | 1672 lm | 3000K | ○ | TL46*-20W-930-W-20-M |
| | | | | | ● | TL46*-20W-930-B-20-M |
| | | | 1665 lm | 4000K | ○ | TL46*-20W-940-W-20-M |
| | | | | | ● | TL46*-20W-940-B-20-M |
| | | ▲ 36° | 1647 lm | 3000K | ○ | TL46*-20W-930-W-36-M |
| | | | | | ● | TL46*-20W-930-B-36-M |
| | | | 1745 lm | 4000K | ○ | TL46*-20W-940-W-36-M |
| | | | | | ● | TL46*-20W-940-B-36-M |


*: 4: 3 Phase 4 wires European Track, 6: 3 Phase 6 wires European Dali track

Technical Data test pattern


CRI80 15°

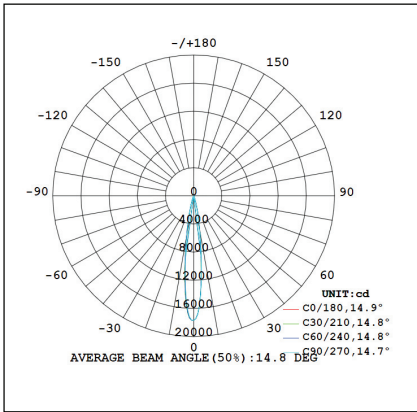


3000K

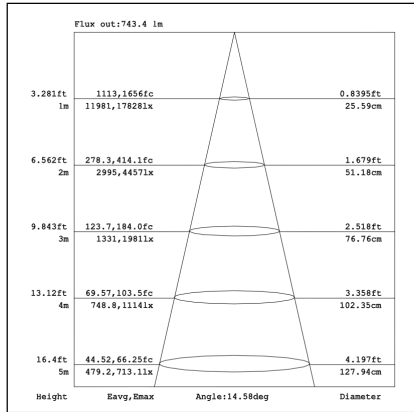


4000K

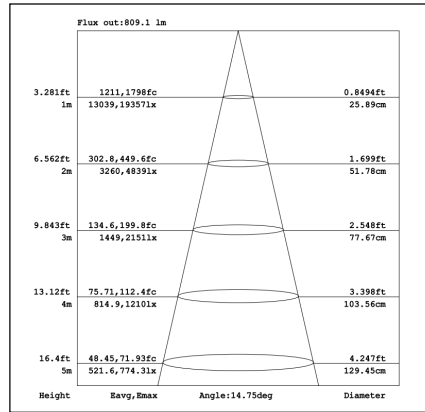


CRI80 20°

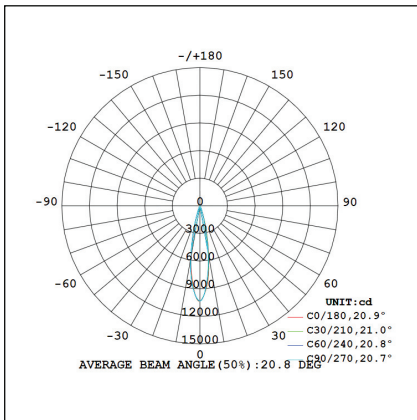


3000K

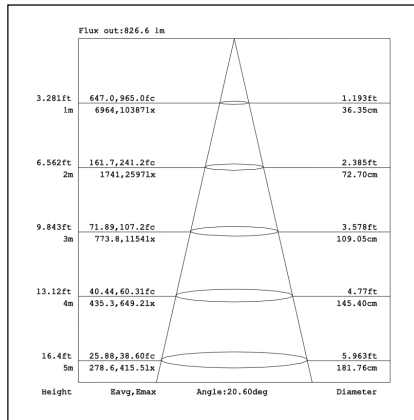


4000K

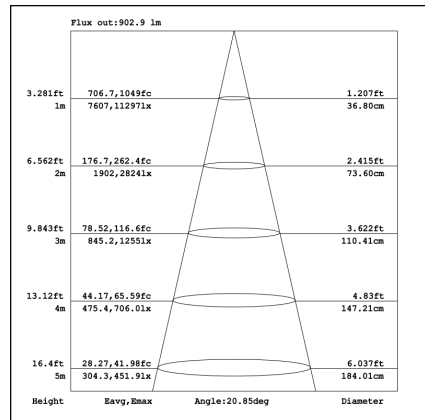


CRI80 36°

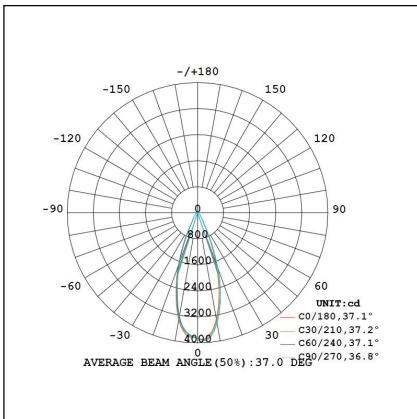


3000K

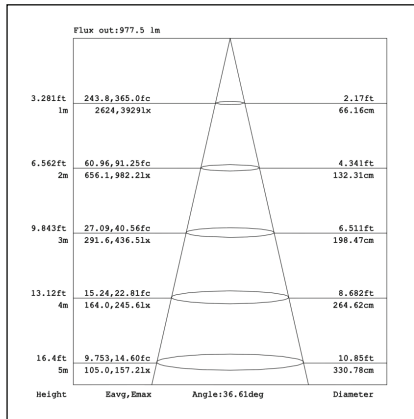


4000K

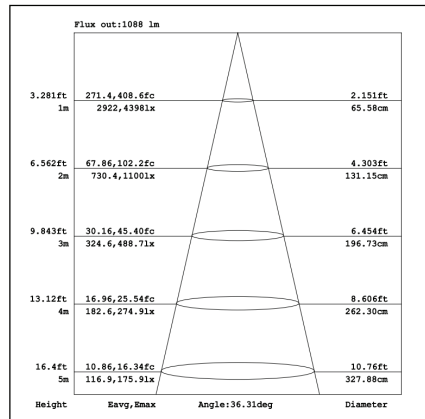


CRI80 48°

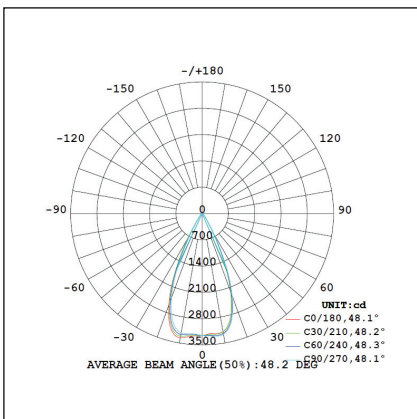


3000K

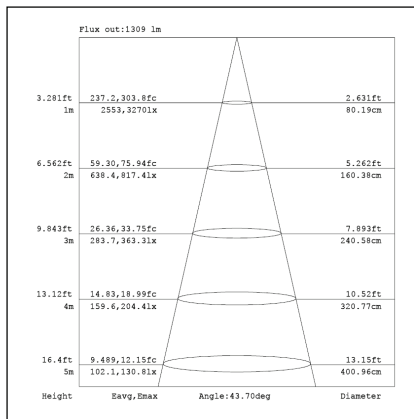


4000K

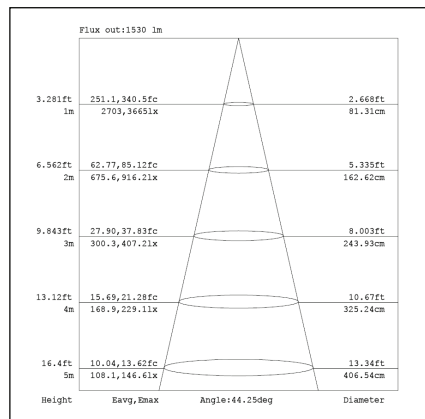


CRI80 60°

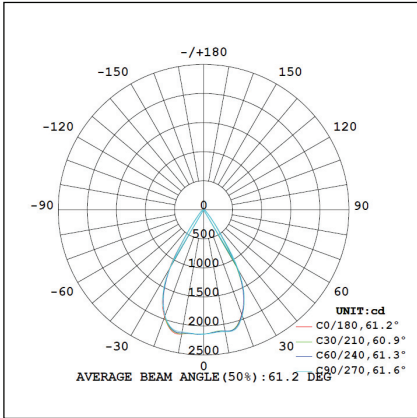


3000K

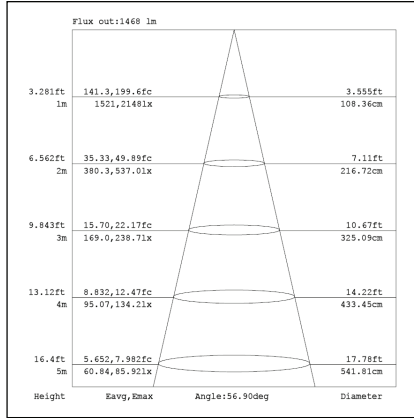


4000K

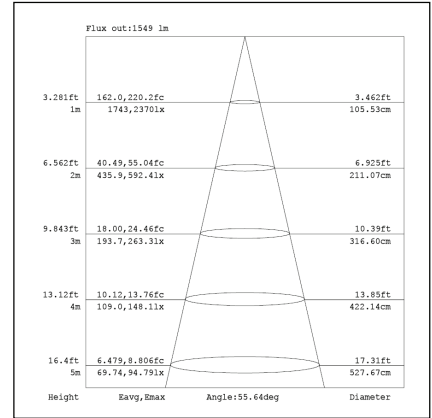


CRI90 15°

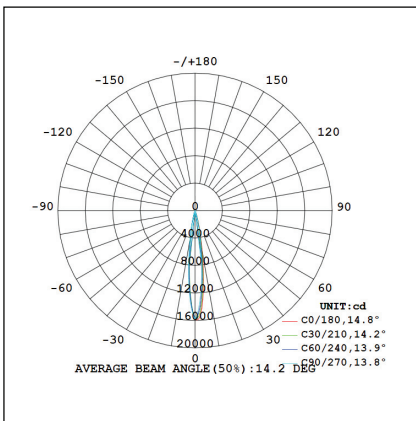


3000K

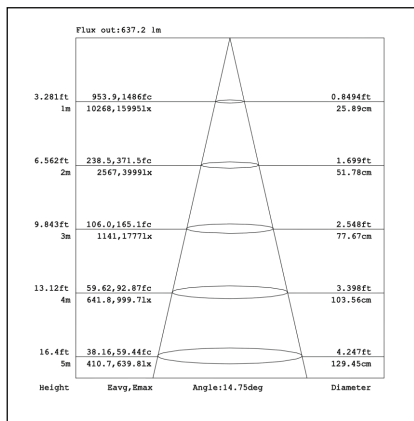


4000K

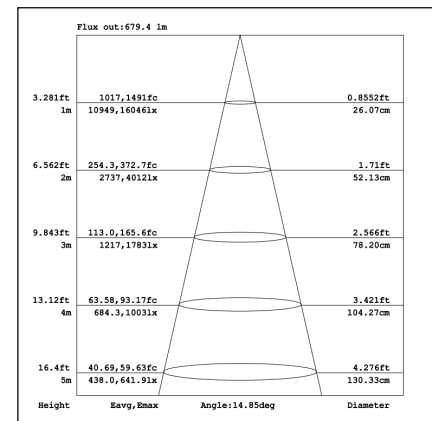


CRI90 20°

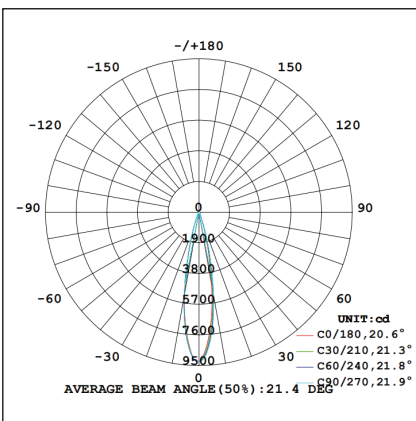


3000K

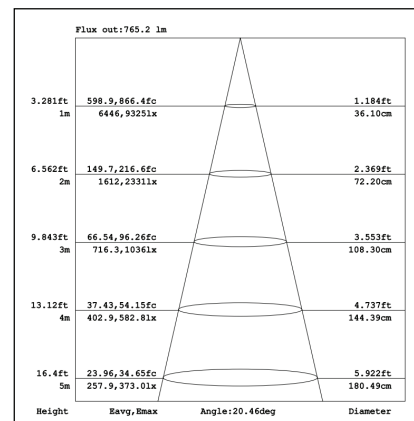


4000K

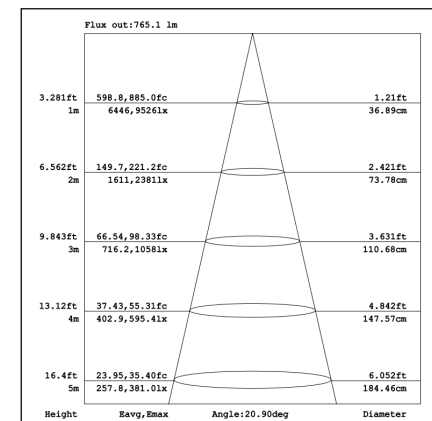


CRI90 36°

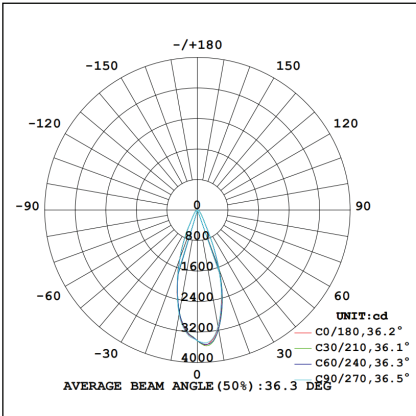

3000K




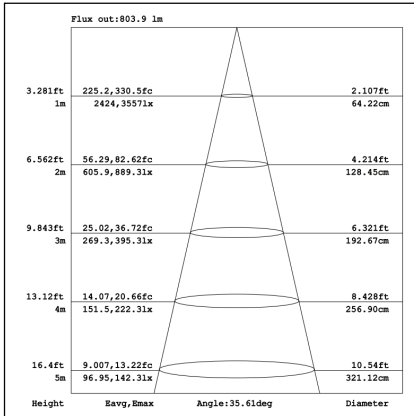


4000K

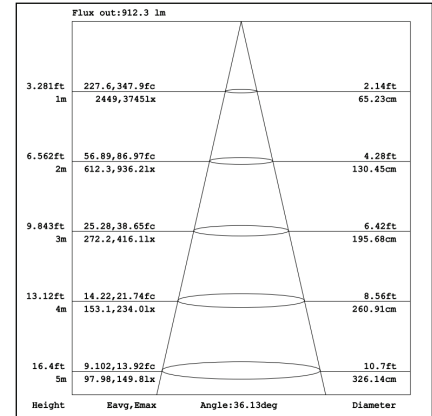


TL46 Tacklight Installation Instructions

Adaptor installation diagram

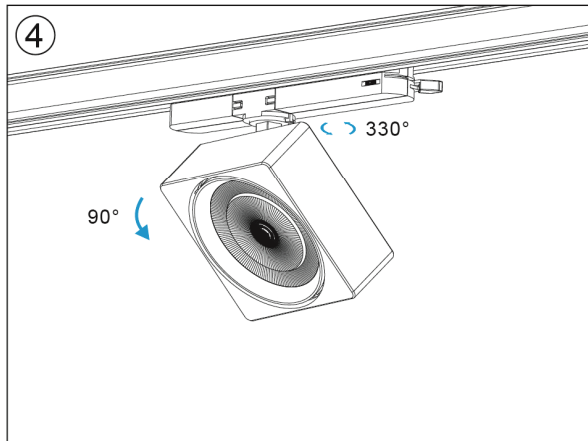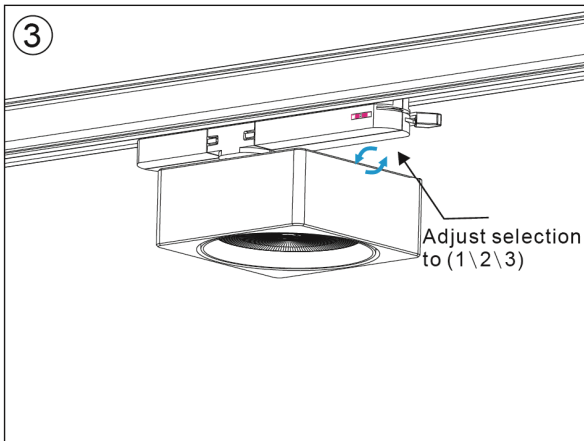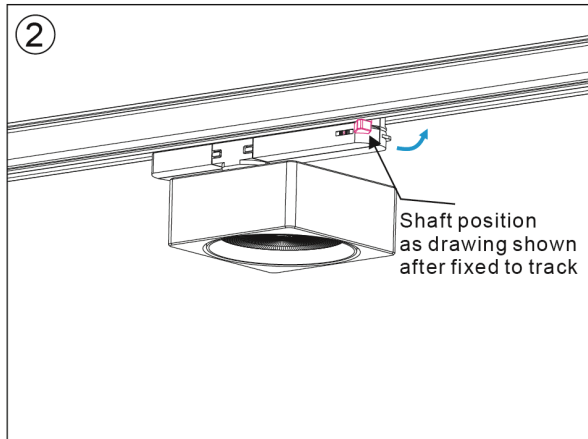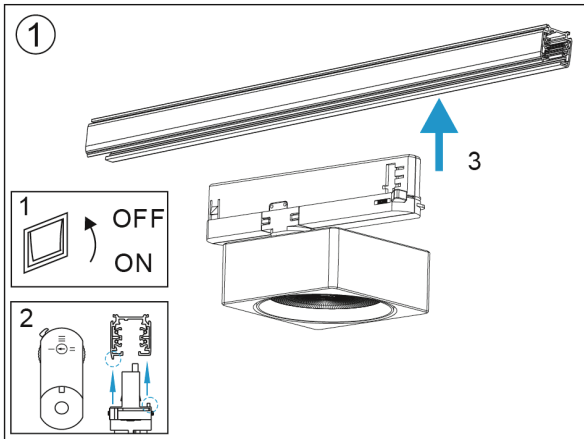


Packaging:

TL46-M



Box
 L210*W210*H90mm
 1pc/box
 GW: 0.7kg/box



Outer carton
 L430*W430*H390mm
 16pcs/CTN
 GW: 11.2kg/carton