


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm					
NAME: DP125RW-F01-24G30		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:120		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.45 lm/W
MODEL	3000K CRI90	I <sub>max</sub> (cd)	5081	S/MH(C0/180)	0.56	
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	0.53	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2026.7	η UP,DN(C0-180)	0.0,52.2	
NOMINAL FLUX(lm)	2026.7	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.8	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	36	η down(%)	100.0	CIBSE SHR MAX	0.60	

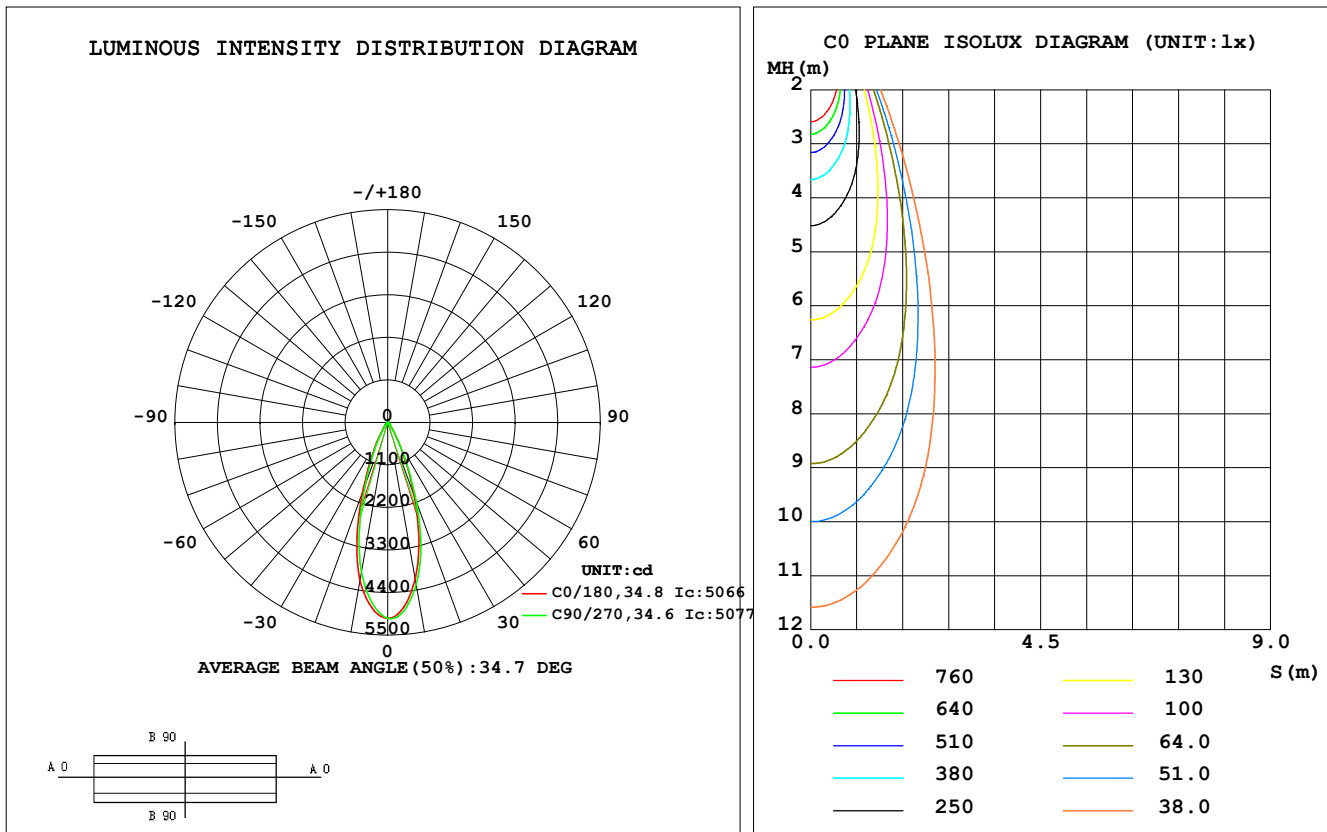

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	4109	4205	4252	4217	4145	3960	3923	4013	0- 10	435.2	435.2	21.5, 21.5
20	2019	2149	2155	2013	1892	1707	1685	1866	10- 20	834.4	1270	62.6, 62.6
30	522.3	560.2	540.2	516.8	501.1	447.2	433.2	472.3	20- 30	486.5	1756	86.6, 86.6
40	117.8	132.5	128.1	116.1	130.3	118.7	116.2	121.8	30- 40	161.2	1917	94.6, 94.6
50	38.67	45.79	49.47	43.99	50.24	40.95	40.31	46.53	40- 50	60.33	1978	97.6, 97.6
60	9.781	10.72	11.44	10.91	21.00	20.16	20.05	20.60	50- 60	21.31	1999	98.6, 98.6
70	7.202	7.572	7.732	7.551	14.38	13.72	13.63	14.09	60- 70	12.85	2012	99.3, 99.3
80	4.885	5.039	4.338	4.949	9.112	8.658	8.414	8.882	70- 80	9.206	2021	99.7, 99.7
90	3.338	3.296	3.285	3.359	5.543	5.430	5.404	5.517	80- 90	5.725	2027	100, 100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1952.5 lm

%lum = 96.3%

%lamp = 96.3%

Conical surface Flux(120deg): 1998.9 lm

%lum = 98.6%


%lamp = 98.6%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: ZR  
 Test Date: 2021-07-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
 Humidity: 65.0%  
 Test Distance: 8.402m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

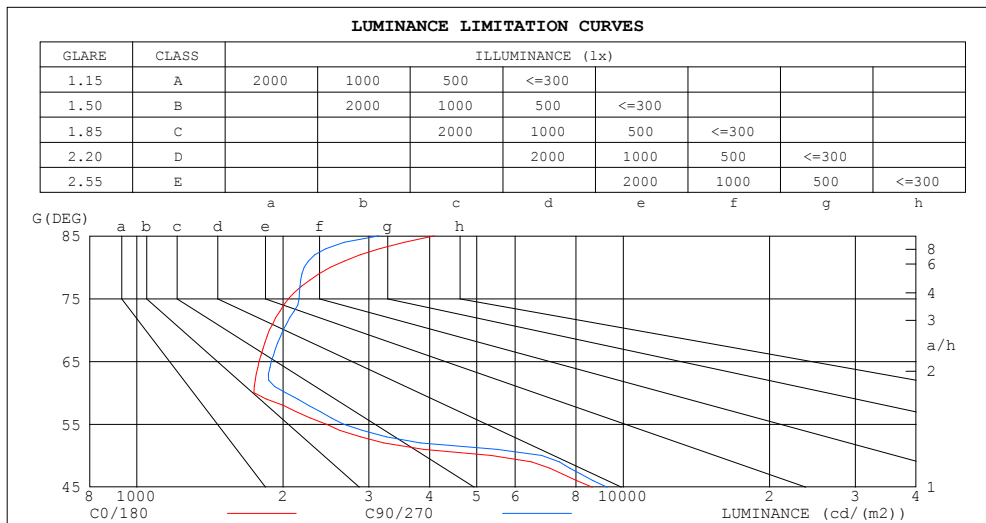

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	4089	3146
80	2503	2209
75	2053	2156
70	1874	1999
65	1786	1890
60	1741	2023
55	2450	2660
50	5353	6805
45	8638	9260


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.09	1.07	1.09	1.07	1.06	1.05	1.04	1.02	1.02	1.01	.99	.98	.97	.97	.95
2.0	1.05	1.02	.99	1.03	1.00	.98	1.00	.98	.95	.97	.95	.93	.95	.93	.91	.90
3.0	.99	.95	.92	.98	.94	.91	.96	.92	.90	.93	.90	.88	.91	.89	.87	.85
4.0	.94	.90	.86	.93	.89	.86	.91	.87	.85	.89	.86	.84	.88	.85	.83	.81
5.0	.90	.85	.81	.89	.84	.81	.87	.83	.80	.86	.82	.80	.84	.81	.79	.78
6.0	.86	.81	.77	.85	.80	.77	.84	.79	.76	.82	.79	.76	.81	.78	.75	.74
7.0	.82	.77	.73	.81	.77	.73	.80	.76	.73	.79	.75	.72	.78	.75	.72	.71
8.0	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
9.0	.75	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.67	.73	.69	.66	.65
10.0	.73	.68	.64	.72	.68	.64	.71	.67	.64	.71	.67	.64	.70	.66	.64	.63

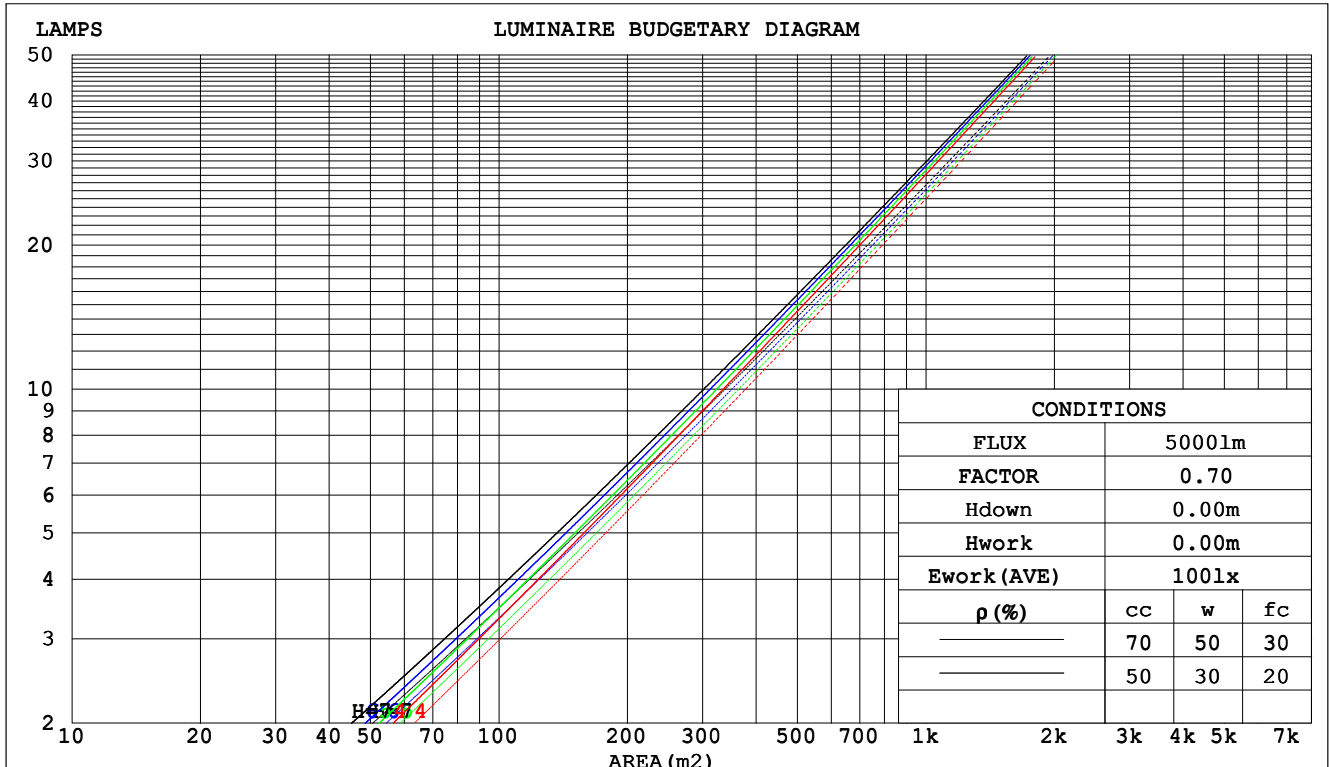

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZR  
 Test Date:2021-07-16

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
 Humidity:65.0%  
 Test Distance:8.402m [K=1.0000]  
 Remarks:

## WEC AND CCEC

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm					
NAME: DP125RW-F01-24G30			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:120		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.161	.092	.029	.155	.088	.028	.142	.082	.026	.131	.075	.024	.120	.070	.022	
2.0	.151	.083	.025	.145	.080	.025	.135	.075	.023	.125	.070	.022	.116	.066	.021	
3.0	.141	.075	.023	.137	.073	.022	.128	.069	.021	.120	.066	.020	.112	.062	.019	
4.0	.133	.069	.020	.129	.068	.020	.122	.064	.019	.115	.062	.019	.108	.059	.018	
5.0	.126	.064	.019	.122	.063	.018	.116	.060	.018	.110	.058	.017	.104	.056	.017	
6.0	.119	.060	.017	.116	.059	.017	.111	.057	.017	.106	.055	.016	.101	.053	.016	
7.0	.114	.056	.016	.111	.055	.016	.106	.054	.015	.102	.052	.015	.097	.050	.015	
8.0	.108	.053	.015	.106	.052	.015	.102	.051	.015	.098	.050	.014	.094	.048	.014	
9.0	.104	.050	.014	.102	.050	.014	.098	.048	.014	.094	.047	.014	.091	.046	.013	
10.0	.100	.048	.013	.098	.047	.013	.094	.046	.013	.091	.045	.013	.088	.044	.013	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.157	.146	.145	.135	.126	.100	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.115	.131	.114	.099	.090	.079	.069	.052	.046	.041	.017	.015	.013	
3.0	.140	.113	.092	.120	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011	
4.0	.128	.098	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009	
5.0	.119	.086	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008	
6.0	.110	.077	.053	.095	.066	.046	.065	.047	.032	.038	.027	.019	.012	.009	.006	
7.0	.103	.069	.045	.089	.060	.039	.061	.042	.028	.036	.025	.016	.012	.008	.005	
8.0	.097	.062	.039	.084	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005	
9.0	.092	.057	.033	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004	
10.0	.087	.052	.029	.075	.045	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

## UGR(Unified Glare Rating) Table

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm											
NAME: DP125RW-F01-24G30					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.:					SUR.:120			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		10.4	11.2	10.6	11.4	11.5	10.5	11.3	10.7	11.5	11.6
	3H	10.4	11.2	10.7	11.4	11.6	10.6	11.3	10.8	11.5	11.7
	4H	10.5	11.2	10.8	11.4	11.6	10.6	11.3	10.9	11.5	11.7
	6H	10.6	11.2	10.9	11.5	11.7	10.7	11.3	11.0	11.6	11.8
	8H	10.7	11.3	11.0	11.5	11.8	10.7	11.3	11.0	11.6	11.9
	12H	10.8	11.4	11.1	11.6	11.9	10.8	11.4	11.1	11.6	11.9
4H	2H	10.3	11.0	10.5	11.2	11.4	10.4	11.1	10.6	11.3	11.5
	3H	10.4	11.0	10.7	11.2	11.5	10.5	11.1	10.8	11.3	11.6
	4H	10.5	11.0	10.8	11.3	11.6	10.6	11.1	10.9	11.4	11.7
	6H	10.7	11.2	11.0	11.5	11.8	10.8	11.2	11.1	11.6	11.9
	8H	10.8	11.3	11.2	11.6	12.0	10.8	11.3	11.2	11.6	12.0
	12H	11.0	11.4	11.4	11.8	12.2	10.9	11.4	11.3	11.7	12.1
8H	4H	10.5	10.9	10.8	11.3	11.6	10.6	11.0	11.0	11.4	11.7
	6H	10.8	11.2	11.2	11.5	12.0	10.8	11.2	11.3	11.6	12.0
	8H	11.0	11.4	11.5	11.8	12.2	11.0	11.3	11.4	11.7	12.2
	12H	11.4	11.7	11.8	12.1	12.6	11.2	11.5	11.6	11.9	12.4
12H	4H	10.4	10.9	10.8	11.2	11.6	10.6	11.0	11.0	11.3	11.7
	6H	10.8	11.1	11.2	11.5	12.0	10.8	11.2	11.3	11.6	12.0
	8H	11.1	11.4	11.5	11.8	12.3	11.0	11.3	11.5	11.8	12.2
Variations with the observer position at spacings:											
S = 1.0H	+ 1.7 / - 2.6					+ 1.9 / - 2.7					
1.5H	+ 3.1 / - 2.6					+ 3.3 / - 2.8					
2.0H	+ 3.0 / - 1.4					+ 3.2 / - 1.6					

CIE Pub.117, 2027 lm Total Lamp Luminous Flux Correct ( $8\log(F/F_0) = 2.5$ )

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

### UTILIZATION FACTORS TABLE

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	88	82	78	87	81	78	75
0.80	95	90	86	95	89	86	94	89	86	82
1.00	100	94	91	99	94	90	97	94	90	86
1.25	104	98	95	102	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	101	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	108	106	110	107	105	107	104	102	96
4.00	114	111	109	112	109	108	108	106	105	98
5.00	115	113	111	113	111	109	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

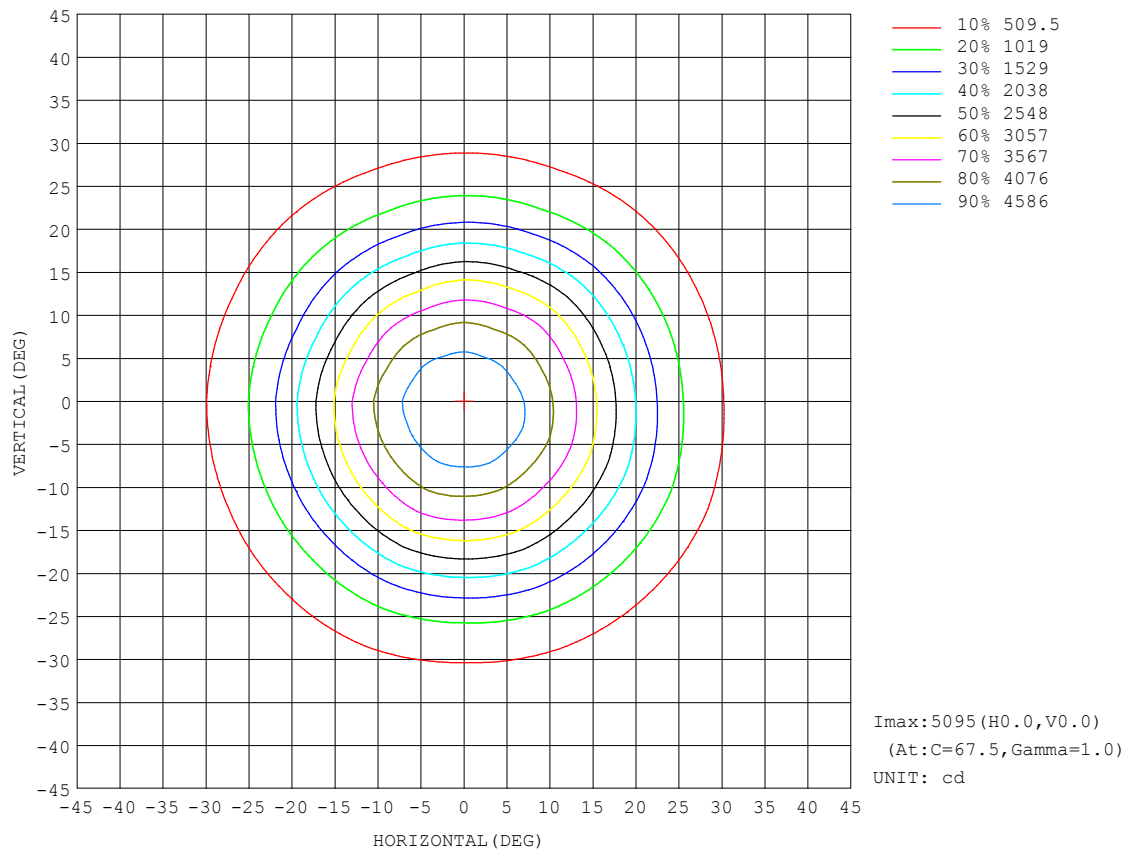


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:



### AAI Figure

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

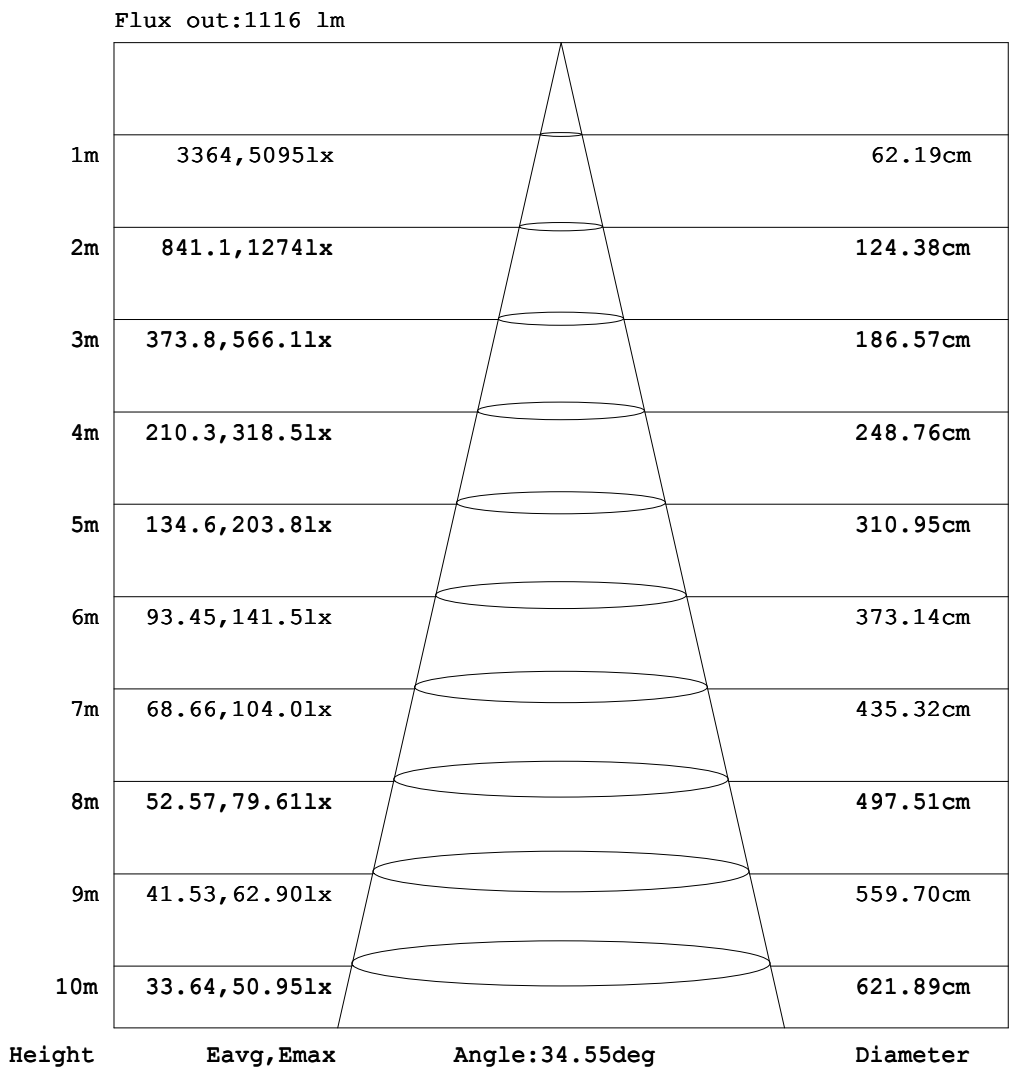


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

### ISOLUX DIAGRAM

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

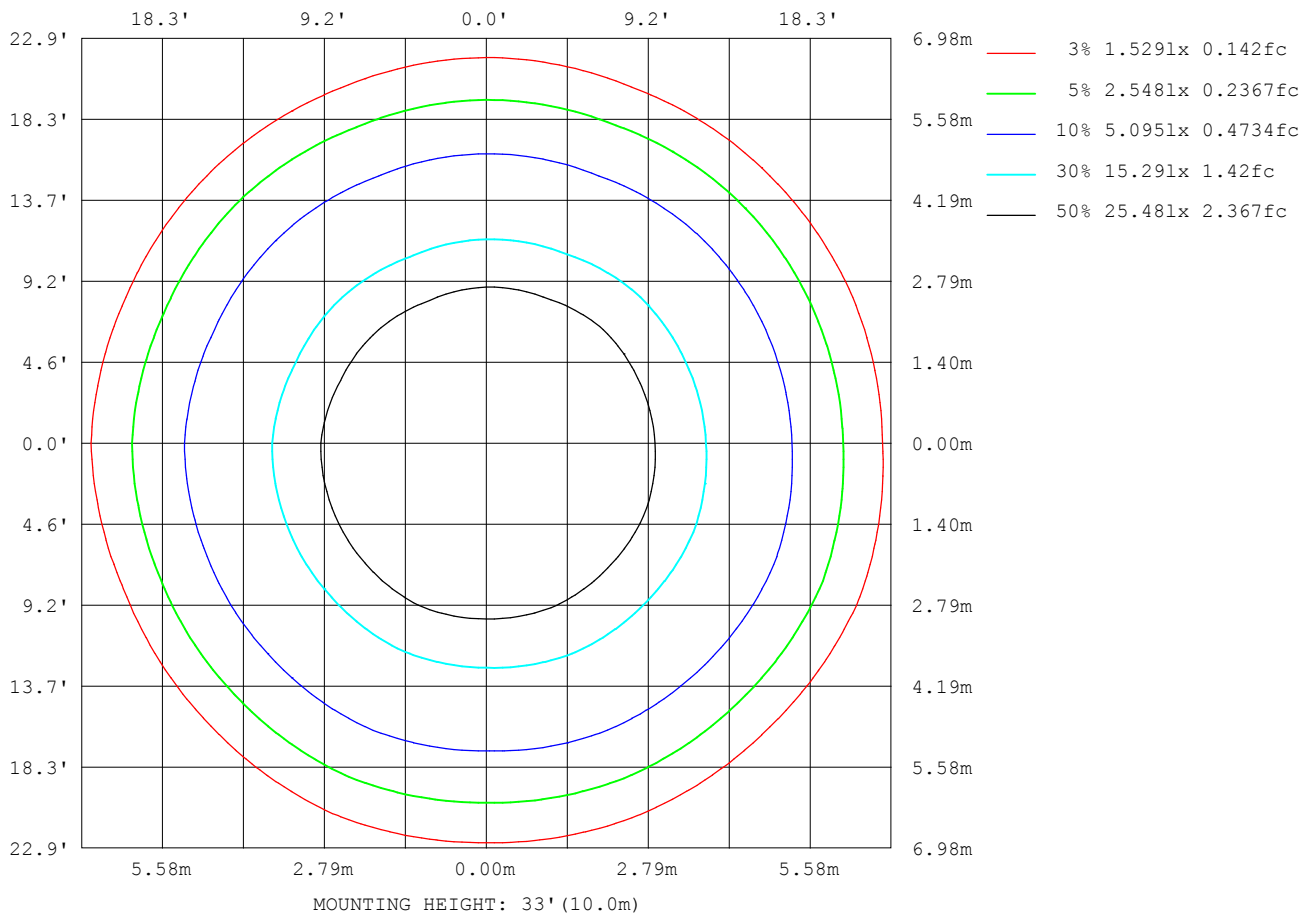

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ZR  
Test Date:2021-07-16

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity:65.0%  
Test Distance:8.402m [K=1.0000]  
Remarks:

## LED Avg.L Report

Test:U:224.8V I:0.1120A P:24.00W PF:0.9530 Freq:50.00Hz Lamp Flux:2026.7x1 lm		
NAME: DP125RW-F01-24G30	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2724
L_0~180 (75) av	2997
L_0~180 (85) av	5636
L_90~270 (65) av	2694
L_90~270 (75) av	2942
L_90~270 (85) av	4690
L_45 (65) av	2709
L_45 (75) av	2979
L_45 (85) av	4968

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ZR  
 Test Date:2021-07-16

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
 Humidity:65.0%  
 Test Distance:8.402m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

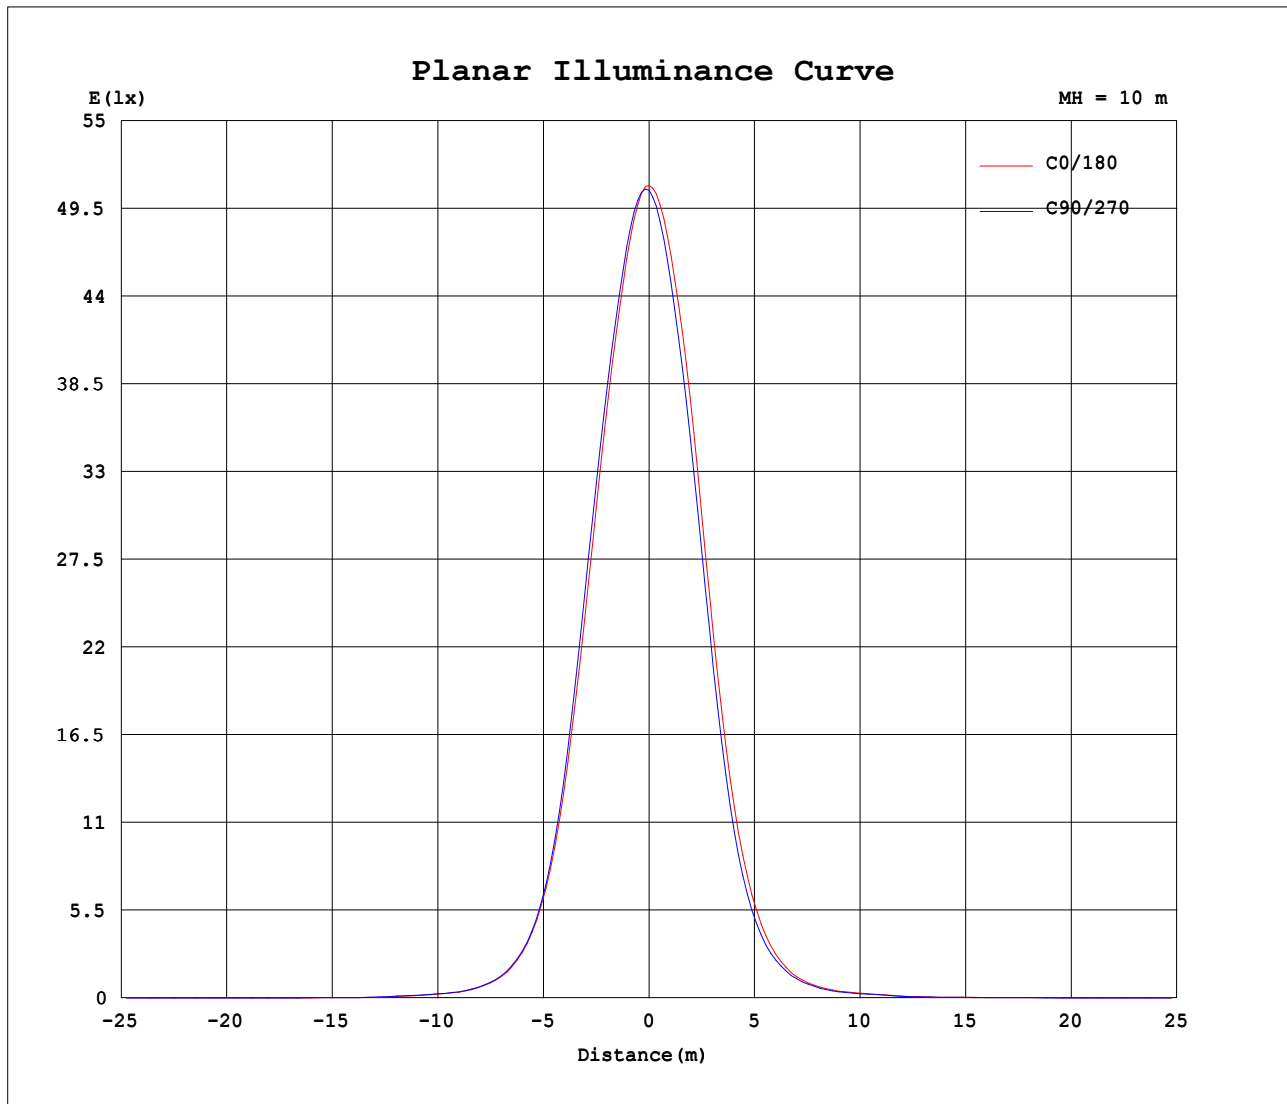

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: ZR  
Test Date: 2021-07-16

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.354  
Humidity: 65.0%  
Test Distance: 8.402m [K=1.0000]  
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

```